


K-NEBELOELER MINI

Mini oil-mist lubricator

HANSA FLEX

Lastnosti

| | |
|---------------------------------|-------------------------------------|
| Obratovalni tlak | min. 2 bar - max. 6 bar |
| temperatura medija | max. 50 °C |
| temperatura okolice | Max. 50 °C |
| vgradni položaj v smeri pretoka | Oil intake at the lowest point/any |
| posoda za olje | Polycarbonate |
| vrsta olja | CL 32 acc. to DIN 51517 - ISO VG 32 |

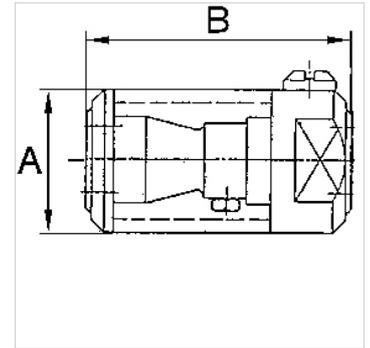

Navodilo

Drugi podatki na zahtevo.

Opis

For mounting on pneumatic impact tools (nail drivers, tackers, screwdrivers) which work intermittently. Also suitable for tools with continuous compressed air demand (grinding and polishing machines). Fixed drip rate: Approx. 0.4 cm³ per 100 work cycles, one filling = 3000 work cycles. Oil consumption in continuous operation (at 6 bar): 0.15 cm³ / Nm³ (varies depending on ambient temperature and oil used).

Artikel

| Opis | Navoj | A (mm) | B | DN |
|----------------|-------|-----------|---------|----|
| K- 07 25 09 11 | G 1/4 | 33,0 | 60,0 mm | 8 |
| K- 07 25 09 12 | G 3/8 | 33,0 | 60,0 mm | 8 |