


# K-DRG SCHALTTAFELEINBAU STANDARD

Pressure regulators

**HANSA FLEX**

## Lastnosti

|                     |   |
|---------------------|---|
| vstopni tlak        | Max. 16 bar K-07250359 - K-07250366), max. 25 bar (K-07250367 - K-07250378) |
| temperatura medija  | max. 60 °C  |
| temperatura okolice | Max. 80 °C  |
| tesnilni material   | NBR   |
| ohišje              | Die-cast zinc, painted silver   |
| meritev pretoka     | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar              |
| drugi podatki       | User manual on request  |

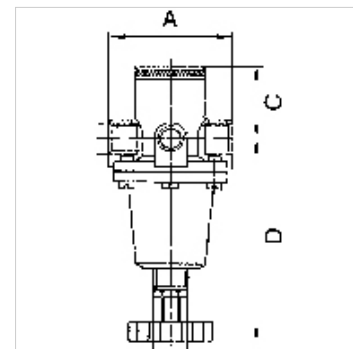

## Opis

- incl. panel nut and washer -, Reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design.

## Artikel

| Opis           | Navoj | regulacijsko območje | pretok (L/min) | A (mm) | C (mm) | D (mm) | DN | navoj stikalne plošče |
|----------------|-------|----------------------|----------------|--------|--------|--------|----|-----------------------|
| K- 07 25 03 59 | G 1/4 | 0.5 - 3 bar          | 1000           | 54,0   | 32,0   | 97,5   | 6  | M 20 x 1.5            |
| K- 07 25 03 60 | G 1/4 | 0.5 - 6 bar          | 1000           | 54,0   | 32,0   | 97,5   | 6  | M 20 x 1.5            |
| K- 07 25 03 61 | G 1/4 | 0.5 - 10 bar         | 1000           | 54,0   | 32,0   | 97,5   | 6  | M 20 x 1.5            |
| K- 07 25 03 62 | G 1/4 | 0.5 - 16 bar         | 1000           | 54,0   | 32,0   | 97,5   | 6  | M 20 x 1.5            |
| K- 07 25 03 63 | G 3/8 | 0.5 - 3 bar          | 1000           | 54,0   | 32,0   | 97,5   | 6  | M 20 x 1.5            |
| K- 07 25 03 64 | G 3/8 | 0.5 - 6 bar          | 1000           | 54,0   | 32,0   | 97,5   | 6  | M 20 x 1.5            |
| K- 07 25 03 65 | G 3/8 | 0.5 - 10 bar         | 1000           | 54,0   | 32,0   | 97,5   | 6  | M 20 x 1.5            |
| K- 07 25 03 66 | G 3/8 | 0.5 - 16 bar         | 1000           | 54,0   | 32,0   | 97,5   | 6  | M 20 x 1.5            |
| K- 07 25 03 67 | G 1/2 | 0.1 - 3 bar          | 2200           | 70,0   | 34,0   | 111,9  | 15 | M 20 x 1.5            |
| K- 07 25 03 68 | G 1/2 | 0.5 - 6 bar          | 2200           | 70,0   | 34,0   | 111,9  | 15 | M 20 x 1.5            |
| K- 07 25 03 69 | G 1/2 | 0.5 - 10 bar         | 2200           | 70,0   | 34,0   | 111,9  | 15 | M 20 x 1.5            |
| K- 07 25 03 70 | G 1/2 | 0.5 - 16 bar         | 2200           | 70,0   | 34,0   | 111,9  | 15 | M 20 x 1.5            |
| K- 07 25 03 71 | G 3/4 | 0.1 - 3 bar          | 5000           | 90,0   | 31,0   | 132,4  | 20 | M 20 x 1.5            |
| K- 07 25 03 72 | G 3/4 | 0.5 - 6 bar          | 5000           | 90,0   | 31,0   | 132,4  | 20 | M 20 x 1.5            |
| K- 07 25 03 73 | G 3/4 | 0.5 - 10 bar         | 5000           | 90,0   | 31,0   | 132,4  | 20 | M 20 x 1.5            |
| K- 07 25 03 74 | G 3/4 | 0.5 - 16 bar         | 5000           | 90,0   | 31,0   | 132,4  | 20 | M 20 x 1.5            |
| K- 07 25 03 75 | G 1   | 0.1 - 3 bar          | 5000           | 90,0   | 31,0   | 132,4  | 25 | M 20 x 1.5            |
| K- 07 25 03 76 | G 1   | 0.5 - 6 bar          | 5000           | 90,0   | 31,0   | 132,4  | 25 | M 20 x 1.5            |
| K- 07 25 03 77 | G 1   | 0.5 - 10 bar         | 5000           | 90,0   | 31,0   | 132,4  | 25 | M 20 x 1.5            |
| K- 07 25 03 78 | G 1   | 0.5 - 16 bar         | 5000           | 90,0   | 31,0   | 132,4  | 25 | M 20 x 1.5            |

## Nadomestni deli

|                            |   |
|----------------------------|---|
| K-HALTERBAUSATZ STANDARD   | Holder  |
| K-VERSCHLEI-SATZ           | Set of wearing parts                                      |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples  |
| K-XV AGM MS NI             | Double nipples, parallel male thread, nickel-plated brass |