


# K-FI PC-BEHÄLTER H ABLV STANDARD

Filters with polycarbonate bowl and semi-automatic drain valve

**HANSA FLEX**

## Lastnosti

|   |   |
|---|---|
| <b>vstopni tlak</b>                       | Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl) |
| <b>temperatura medija</b>                 | max. 60 °C  |
| <b>temperatura okolice</b>                | Max. 60 °C  |
| <b>velikost por v filtrirnem elementu</b> | 5 µm (Size 1 / Size 3), 40 µm (Size 2 / Size 4), 60 µm (Size 5)         |
| <b>ohišje</b>                             | Die-cast zinc, painted silver   |
| <b>meritev pretoka</b>                    | At P2 = 6 bar and pressure drop $\Delta p = 1$ bar                      |
| <b>drugi podatki</b>                      | User manual on request  |

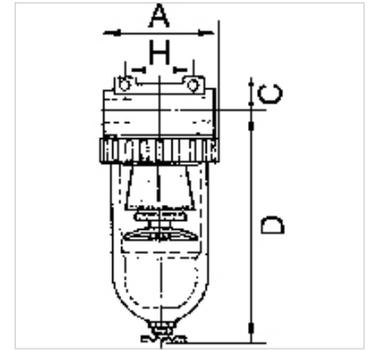

## Navodilo

G 2 1/2 and G 3 filters available on request

## Opis

Centrifugal separators with a sintered filter element.

## Artikel

| Opis           | Navoj   | pretok (L/min) | A (mm) | C (mm) | D (mm) | DN | H (mm) |
|----------------|---------|----------------|--------|--------|--------|----|--------|
| K- 07 25 05 85 | G 1/4   | 800            | 48,0   | 14,0   | 131,6  | 6  | 38,0   |
| K- 07 25 05 88 | G 3/8   | 800            | 48,0   | 14,0   | 131,6  | 6  | 38,0   |
| K- 07 25 05 91 | G 3/8   | 3100           | 70,0   | 16,0   | 145,7  | 10 | 50,0   |
| K- 07 25 05 94 | G 1/2   | 4000           | 79,0   | 18,0   | 168,4  | 15 | 50,0   |
| K- 07 25 05 97 | G 3/4   | 4000           | 102,0  | 26,5   | 169,9  | 20 | 50,0   |
| K- 07 25 06 00 | G 1     | 4000           | 90,0   | 26,5   | 169,9  | 25 | 50,0   |
| K- 07 25 06 03 | G 1 1/4 | 12500          | 125,0  | 36,5   | 243,4  | 40 | 105,0  |
| K- 07 25 06 06 | G 1 1/2 | 12500          | 125,0  | 36,5   | 243,4  | 45 | 105,0  |

## Nadomestni deli

|                            |   |
|----------------------------|---|
| K-HALTERBAUSATZ STANDARD   | Holder  |
| K-FILTERELEMENT            | Filter element  |
| K-SCHUTZKORB G             | Protective cage   |
| K-AUTOMAT ABLASSVENTIL     | Automatic drain valve                                     |
| K-XV AGM MS NI             | Double nipples, parallel male thread, nickel-plated brass |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples  |
| K-ABLASSVENTIL AUTO        | Fully-automatic drain valve with Adapter G 1/8            |