


# K-FI REGL PC-BEHÄLTER S H ABL STANDARD

Filter regulators with polycarbonate bowl, bowl guard and semi-automatic drain valve

**HANSA FLEX**

## Lastnosti

|   |   |
|---|---|
| <b>vstopni tlak</b>                       | Max. 16 bar (polycarbonate bowl), Max. 25 bar (metal bowl)                            |
| <b>regulacijsko območje</b>               | 0.5 to 10 bar (polycarbonate bowl), 0.5 to 16 bar (metal bowl)                        |
| <b>temperatura medija</b>                 | max. 60 °C  |
| <b>temperatura okolice</b>                | Max. 60 °C  |
| <b>velikost por v filtrirnem elementu</b> | 5 µm (Size 1 / Size 3), 40 µm (Size 2 / Size 4)                                       |
| <b>tesnilni material</b>                  | NBR   |
| <b>ohišje</b>                             | Die-cast zinc (G1/4 to G1/2), silver painted / aluminium (G3/4 to G1), silver painted |
| <b>meritev pretoka</b>                    | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar                        |

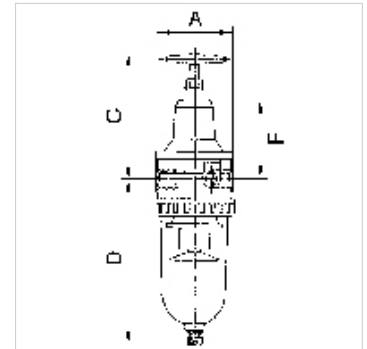

## Navodilo

Drugi podatki na zahtevo.

## Opis

Reversible diaphragm pressure regulators, independent of inlet pressure, with selfrelieving design, combined with a centrifugal separator.

## Artikel

| Opis           | Navoj | pretok (L/min) | A (mm) | C (mm) | D (mm) | DN | F (mm) |
|----------------|-------|----------------|--------|--------|--------|----|--------|
| K- 07 25 06 68 | G 1/4 | 900            | 54,0   | 106,5  | 129,7  | 8  | 62,0   |
| K- 07 25 06 71 | G 3/8 | 900            | 54,0   | 106,5  | 129,7  | 8  | 62,0   |
| K- 07 25 06 74 | G 3/8 | 1500           | 70,0   | 120,5  | 145,9  | 11 | 76,5   |
| K- 07 25 06 78 | G 1/2 | 3000           | 82,0   | 130,0  | 169,4  | 14 | 83,0   |
| K- 07 25 06 81 | G 3/4 | 7000           | 125,0  | 190,6  | 261,4  | 25 | 145,0  |
| K- 07 25 06 84 | G 1   | 7000           | 125,0  | 190,6  | 261,4  | 25 | 145,0  |

## Nadomestni deli

|                            |   |
|----------------------------|---|
| K-HALTERBAUSATZ STANDARD   | Holder  |
| K-SCHUTZKORB G             | Protective cage   |
| K-FILTERELEMENT            | Filter element  |
| K-VERSCHLEI-SATZ           | Set of wearing parts                                      |
| K-XV AGM MS NI             | Double nipples, parallel male thread, nickel-plated brass |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples  |
| K-ABLASSVENTIL AUTO        | Fully-automatic drain valve with Adapter G 1/8            |
| K-AUTOMAT ABLASSVENTIL     | Automatic drain valve                                     |