


# K-NEBELOELER PC-BEHÄLTER STANDARD

Oil-mist lubricators with polycarbonate bowl and bowl guard

**HANSA FLEX**

## Lastnosti

|                            |  |
|----------------------------|--|
| <b>vstopni tlak</b>        | Max. 16 bar (polycarbonate bowl / bowl guard),<br>Max. 25 bar (metal bowl) |
| <b>temperatura medija</b>  | max. 60 °C   |
| <b>temperatura okolice</b> | Max. 60 °C   |
| <b>tesnilni material</b>   | NBR  |
| <b>ohišje</b>              | Die-cast zinc, painted silver  |
| <b>kapalni nastavek</b>    | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)                       |
| <b>vrsta olja</b>          | CL 32 acc. to DIN 51517 - ISO VG 32  |
| <b>meritev pretoka</b>     | At P2 = 6 bar and pressure drop $\Delta p = 1$ bar                         |
| <b>drugi podatki</b>       | User manual on request   |

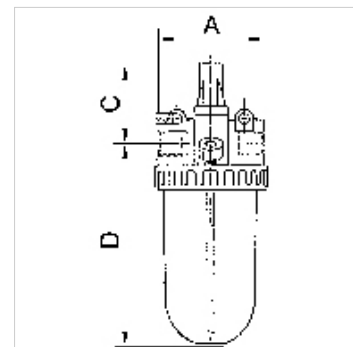

## Opis

Proportional lubricators, oil can be filled under pressure.

## Artikel

| Opis           | Navoj   | pretok<br>(L/min) | A<br>(mm) | C<br>(mm) | D<br>(mm) | DN |
|----------------|---------|-------------------|-----------|-----------|-----------|----|
| K- 07 25 08 89 | G 1/4   | 1200              | 50,0      | 51,0      | 118,0     | 6  |
| K- 07 25 08 92 | G 3/8   | 1200              | 50,0      | 51,0      | 118,0     | 6  |
| K- 07 25 08 95 | G 3/8   | 2400              | 70,0      | 51,0      | 129,5     | 10 |
| K- 07 25 08 98 | G 1/2   | 4000              | 79,0      | 55,0      | 157,0     | 15 |
| K- 07 25 09 01 | G 3/4   | 9000              | 102,0     | 58,0      | 160,0     | 20 |
| K- 07 25 09 04 | G 1     | 9000              | 90,0      | 58,0      | 160,0     | 25 |
| K- 07 25 09 07 | G 1 1/4 | 9000              | 137,0     | 70,0      | 232,0     | 40 |
| K- 07 25 09 10 | G 1 1/2 | 9000              | 125,0     | 70,0      | 232,0     | 45 |

## Nadomestni deli

|                                   |   |
|-----------------------------------|---|
| <b>K-HALTERBAUSATZ STANDARD</b>   | Holder  |
| <b>K-SCHUTZKORB G</b>             | Protective cage   |
| <b>K-TROPFAUFSATZ POLYCARBO</b>   | Drip attachment polycarbonate                             |
| <b>K-XV AGM MS NI</b>             | Double nipples, parallel male thread, nickel-plated brass |
| <b>K-RD NIPPEL MS NI</b>          | Reducing nipples - nickel-plated brass                    |
| <b>K-LOESBARE DOPPELNIPPEL MS</b> | Double nipples  |
| <b>K-TROPFAUFSATZ METALL</b>      | Drip attachment metal                                     |