


# K-FI METALLBEHAELTER STANDARD-MINI

Filters with metal bowl

**HANSA FLEX**

## Lastnosti

<b>vstopni tlak</b>	Max. 16 bar (polycarbonate bowl), Max. 25 bar (metal bowl)
<b>temperatura medija</b>	max. 60 °C
<b>temperatura okolice</b>	Max. 60 °C
<b>pretok</b>	800 l/min
<b>velikost por v filtrirnem elementu</b>	8 µm
<b>tesnilni material</b>	NBR
<b>ohišje</b>	Die-cast zinc, painted silver
<b>Drain valve</b>	Semi-automatic for variant with polycarbonate bowl, Manual for variant with metal bowl
<b>meritev pretoka</b>	At P2 = 6 bar and pressure drop $\Delta p = 1$ bar
<b>drugi podatki</b>	User manual on request

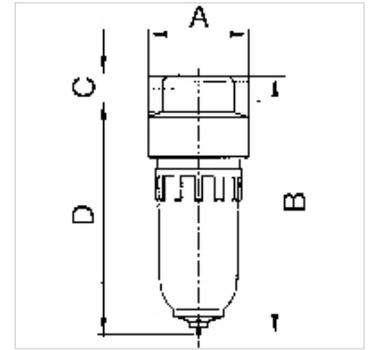

## Opis

Centrifugal separators with a sintered filter element. Compact design.

## Artikel

Opis	Navoj	A (mm)	B	C (mm)	D (mm)	DN
K- 07 25 05 83	G 1/8	40,0	108,5 mm	10,0	98,5	5
K- 07 25 05 84	G 1/4	40,0	108,5 mm	10,0	98,5	5

## Nadomestni deli

K-ERSATZBEHAELTER MULTI MINI	Spare tank »multifix-mini« & »standard-mini«
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-FILTERELEMENT	Filter element
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-LOESBARE DOPPELNIPPEL MS	Double nipples
K-XV AGM MS NI	Double nipples, parallel male thread, nickel-plated brass