


K-DRG DRVS VARIOBLOC

Pressure regulators with pressure supply at both ends

HANSA FLEX

Lastnosti

| | |
|---------------------|---|
| vstopni tlak | Max. 25 bar |
| temperatura medija | max. 50 °C |
| temperatura okolice | Max. 50 °C |
| tesnilni material | NBR |
| vzmetni pokrov | POM-brass |
| ohišje | Die-cast zinc |
| meritev pretoka | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

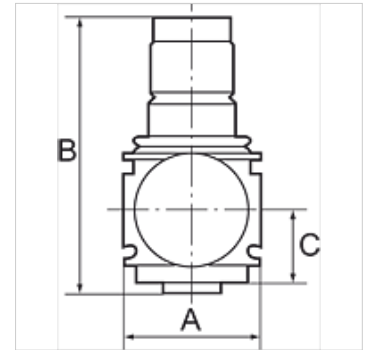

Navodilo

Drugi podatki na zahtevo.

Opis

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down.
By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

Navodila za naročanje

Pressure regulators are also available in lockable version. Please ask for more information.

Artikel

| Opis | Navoj | regulacijsko območje | pretok (L/min) | A (mm) | B | C (mm) |
|----------------|-------|----------------------|----------------|--------|---------|--------|
| K- 07 25 04 33 | G 1/4 | 0.5 - 6 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 34 | G 1/4 | 0.5 - 10 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 35 | G 1/4 | 0.5 - 16 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 36 | G 3/8 | 0.5 - 6 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 37 | G 3/8 | 0.5 - 10 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 38 | G 3/8 | 0.5 - 16 bar | 1800 | 48,0 | 98,0 mm | 26,0 |

Nadomestni deli

K-VERSCHLEI-SATZ VARIOBLOC Set of wearing parts