


# K-DRG DRVS VARIOBLOC

Pressure regulators with pressure supply at both ends

**HANSA FLEX**

## Lastnosti

|                     |   |
|---------------------|---|
| vstopni tlak        | Max. 25 bar   |
| temperatura medija  | max. 50 °C  |
| temperatura okolice | Max. 50 °C  |
| tesnilni material   | NBR   |
| vzmetni pokrov      | POM-brass   |
| ohišje              | Die-cast zinc   |
| meritev pretoka     | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

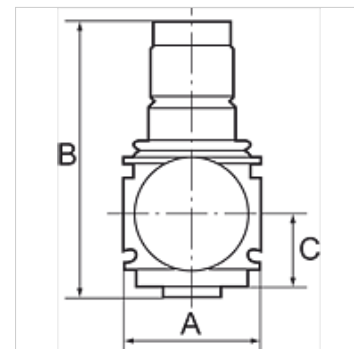

## Navodilo

Drugi podatki na zahtevo.

## Opis

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down. <br>By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

## Navodila za naročanje

Pressure regulators are also available in lockable version. Please ask for more information.

## Artikel

| Opis           | Navoj | regulacijsko območje | pretok (L/min) | A (mm) | B       | C (mm) |
|----------------|-------|----------------------|----------------|--------|---------|--------|
| K- 07 25 04 33 | G 1/4 | 0.5 - 6 bar          | 1800           | 48,0   | 98,0 mm | 26,0   |
| K- 07 25 04 34 | G 1/4 | 0.5 - 10 bar         | 1800           | 48,0   | 98,0 mm | 26,0   |
| K- 07 25 04 35 | G 1/4 | 0.5 - 16 bar         | 1800           | 48,0   | 98,0 mm | 26,0   |
| K- 07 25 04 36 | G 3/8 | 0.5 - 6 bar          | 1800           | 48,0   | 98,0 mm | 26,0   |
| K- 07 25 04 37 | G 3/8 | 0.5 - 10 bar         | 1800           | 48,0   | 98,0 mm | 26,0   |
| K- 07 25 04 38 | G 3/8 | 0.5 - 16 bar         | 1800           | 48,0   | 98,0 mm | 26,0   |

## Nadomestni deli

K-VERSCHLEI-SATZ VARIOBLOC Set of wearing parts