


K-SCHALTVENTILE 3/2 VAROBLOC

On-off valves (3/2-way valves)

HANSA FLEX

Lastnosti

| | |
|-----------------|--|
| razred zaščite | IP 65 acc. to DIN 40050 |
| delovni tlak | 3 to 10 bar |
| meritev pretoka | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

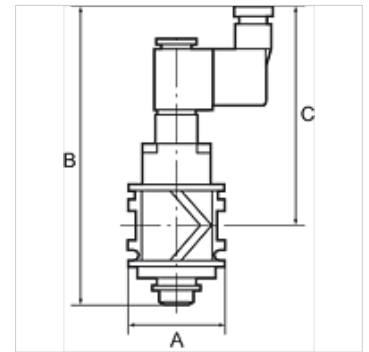

Navodilo

Drugi podatki na zahtevo.

Opis

For pressurising and relieving pneumatic systems. Ideal as the main "on" valve for service units. The pressure in the line is exhausted when the valve is switched off.

Artikel

| Opis | Navoj | pretok (L/min) | A (mm) | Priključek | B | C (mm) | Napetost |
|----------------|-------|----------------|--------|---|----------|--------|----------|
| K- 07 25 11 94 | G 1/4 | 2200 | 48,0 | Device plug PG 9, type B, EN 175301-803 | 147,0 mm | 108,0 | 24 V DC |
| K- 07 25 11 95 | G 3/8 | 2600 | 48,0 | Device plug PG 9, type B, EN 175301-803 | 147,0 mm | 108,0 | 24 V DC |
| K- 07 25 11 96 | G 1/2 | 3300 | 70,0 | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0 | 24 V DC |
| K- 07 25 11 97 | G 3/4 | 3800 | 70,0 | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0 | 24 V DC |
| K- 07 25 11 98 | G 1 | 3800 | 124,0 | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0 | 24 V DC |

Nadomestni deli

| | |
|-------------------------|-----------------|
| K-MAGNETSPULE VARIOBLOC | Solenoid |
| K-GERAETESTECKER | Coupling socket |