


# K-DRV STECK V SCHLITZ

Unidirectional flow control valves, incoming air restriction (»V«), plug-in connector

**HANSA FLEX**

## Lastnosti

|   |                                    |
|---|------------------------------------|
| Obratovalni tlak                              | maks. 10 bar                       |
| območje temperatur:                           | 0 °C to +70 °C                     |
| votli vijak, vrtljiva ročica, regulirni vijak | Nickel-plated brass                |
| notranji deli                                 | Brass with a bare metal surface    |
| tesnilo z zavihkom tesnilnega obroča          | NBR                                |
| tesnila (neizgubljiva)                        | Polyamide (glass fibre-reinforced) |

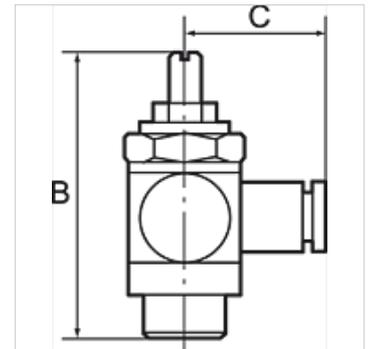

## Navodilo

Drugi podatki na zahtevo.

## Opis

For fine regulation of a cylinder piston speed in the forward and return motion and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder to restrict the incoming air. Compact type of construction, also ideal where space is restricted.

## Artikel

| Opis           | C<br>(mm) | za cev | Navoj | zev ključa | B<br>(mm) |
|----------------|-----------|--------|-------|------------|-----------|
| K- 07 15 05 28 | 18,6      | 4 mm   | M 5   | 8 mm       | 24,5      |
| K- 07 15 05 29 | 21,7      | 6 mm   | M 5   | 8 mm       | 24,5      |
| K- 07 15 05 33 | 20,6      | 4 mm   | G 1/8 | 14 mm      | 32,0      |
| K- 07 15 05 34 | 22,7      | 6 mm   | G 1/8 | 14 mm      | 32,0      |
| K- 07 15 05 35 | 23,7      | 8 mm   | G 1/8 | 14 mm      | 32,0      |
| K- 07 15 05 31 | 24,2      | 6 mm   | G 1/4 | 17 mm      | 40,0      |
| K- 07 15 05 32 | 24,7      | 8 mm   | G 1/4 | 17 mm      | 40,0      |
| K- 07 15 05 30 | 26,8      | 10 mm  | G 1/4 | 17 mm      | 40,0      |
| K- 07 15 05 36 | 28,3      | 10 mm  | G 3/8 | 20 mm      | 50,0      |