


K-WFV 5/2 NICHT RASTEND FUS

5/2-way foot-operated valves (monostable, non-latching, with foot guard)

HANSA FLEX

Lastnosti

| | |
|----------------------------------------|---------------------------------------------|
| Obratovalni tlak | 2.5 - 10 bar |
| območje temperatur: | -10 °C to +60 °C |
| pretok pri 6,3 bar in Δ 0,5 bar | 60 NI/min (4 mm and M5), 640 NI/min (G 1/4) |
| pretok pri 6,3 bar in Δ 1 bar | 95 NI/min (4 mm and M5), 840 NI/min (G 1/4) |

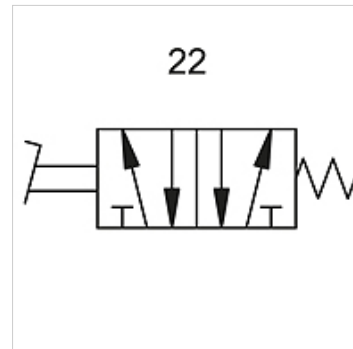

Navodilo

Drugi podatki na zahtevo.

Opis

Foot-operated valves, 3/2- and 5/2-way types, bistable or monostable (non-latching).

Artikel

| Opis | Priključek | številka vezalne sheme |
|----------------|------------|------------------------|
| K- 07 15 01 91 | G 1/4 | 22 |