



# K-SNV ENTLUE V SCHA SCHL SCHL

Quick-exhaust valves, with silencer, pipe - pipe

**HANSA FLEX**

## Lastnosti

<b>Obratovalni tlak</b>	1 - 10 bar
<b>pretok 6,3bar</b>	50 NI/min (Ø 4), 270 NI/min (Ø 6), 400 NI/min (Ø 8)
<b>pretok odzračevanje 6,3 bar</b>	100 NI/min (Ø 4), 700 NI/min (Ø 6), 1000 NI/min (Ø 8)
<b>območje temperatur:</b>	-20 °C to +60 °C
<b>ohišje</b>	Technopolymer
<b>notranji deli</b>	nickel-plated brass, brass, Technopolymer, stainless steel
<b>tesnilni material</b>	NBR
<b>Montaža</b>	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
<b>simbol</b>	on the housing

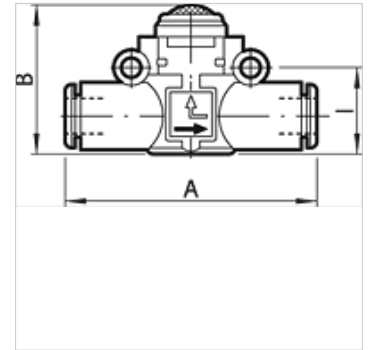

## Navodilo

Drugi podatki na zahtevo.

## Opis

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design. All components can be installed in parallel, in series, in a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

## Artikel

Opis	za Ø cevi (mm)	A (mm)	B (mm)	l (mm)
K- 07 15 25 28	4	41,8	19,8	12,8
K- 07 15 20 32	6	49,0	25,5	14,6
K- 07 15 20 33	8	57,2	31,5	18,7