
# K-KURZH ZYL EINFACHW

Short-stroke cylinders, single-acting (magnetic)

## Lastnosti

| | |
|---|---|
| **Sredstva** | Filtered compressed air, lubricated (ensure continuity) or unlubricated |
| **Obratovalni tlak** | maks. 10 bar |
| **vklopni tlak** | 0,6 bar (Ø 12 bis Ø 32), 0,4 bar (Ø 40 bis Ø 80) |
| **območje temperatur:** | -10 °C to +80 °C |
| **batnica** | C45 steel, hard chrome-plated |
| **cev** | Aluminium alloy, anodised |
| **premer glave** | Ø 12 to Ø 25 painted brass, Ø 32 to Ø 80 aluminium |
| **bat** | Ø 12 to Ø 63 synthetic (acetal) resin, Ø 80 alu/ PTFE |
| **tesnilo batnice** | NBR (additional charge for PU and FKM) |
| **tesnilo bata** | NBR (additional charge for PU and FKM) |



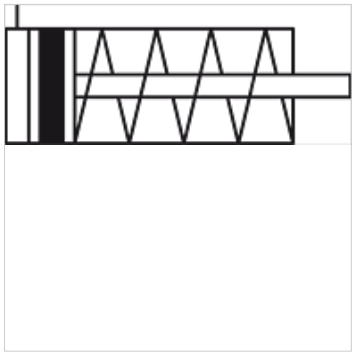

## Navodilo

Drugi podatki na zahtevo.

## Opis

Suitable for installation in limited spaces, with magnet.

## Dodatne informacije

Important: The scope of supply does not include a connector. Please order separately.

Other types, e.g. increased thermal stability, non-standard strokes, through rod, non-rotating version, etc., available on request.

## Artikel

| Opis | Ø bata | Hod (mm) | Priključek | navoj znotraj batnica |
|---|---|---|---|---|
| **K- 07 15 11 87** | 12 mm | 10 | M 5 | M 3 |
| **K- 07 15 11 88** | 12 mm | 25 | M 5 | M 3 |
| **K- 07 15 11 89** | 16 mm | 10 | M 5 | M 5 |
| **K- 07 15 11 90** | 16 mm | 25 | M 5 | M 5 |
| **K- 07 15 11 91** | 20 mm | 10 | M 5 | M 5 |
| **K- 07 15 11 92** | 20 mm | 25 | M 5 | M 5 |
| **K- 07 15 11 93** | 25 mm | 10 | G 1/8 | M 5 |
| **K- 07 15 11 94** | 25 mm | 25 | G 1/8 | M 5 |
| **K- 07 15 11 95** | 32 mm | 10 | G 1/8 | M 6 |
| **K- 07 15 11 96** | 32 mm | 25 | G 1/8 | M 6 |
| **K- 07 15 11 97** | 40 mm | 10 | G 1/8 | M 6 |
| **K- 07 15 11 98** | 40 mm | 25 | G 1/8 | M 6 |
| **K- 07 15 11 99** | 50 mm | 25 | G 1/8 | M 8 |
| **K- 07 15 12 00** | 63 mm | 25 | G 1/8 | M 8 |

## Pribor

| | |
|---|---|
| **K-MAGNETSENSOREN-REED** | Reed magnetic sensor (incl. 2.5 m cable) |

*Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.*