


# K-SCHNELLENTLUEFTUNG V

Quick-exhaust valves

**HANSA FLEX**

## Lastnosti

min. delovni tlak	0,5 bar
Obratovalni tlak	maks. 12 bar
delovna temperatura	Max. 80 °C
opis navoja	G thread acc. DIN EN ISO 228-1
ohišje	Nickel-plated brass
membrana	Polyurethane

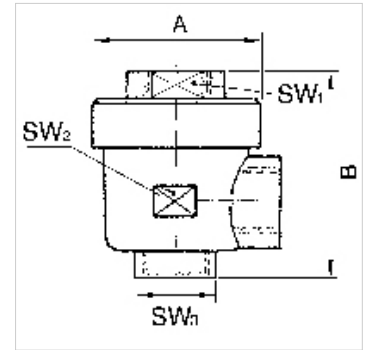

## Navodilo

Drugi podatki na zahtevo.

## Artikel

Opis	Navoj	A (mm)	B (mm)	zav ključa 1 (mm)	zav ključa 2 (mm)	zav ključa 3 (mm)
K- 07 30 25 18	G 1/8	28,0	42,0	14	14	14
K- 07 30 25 17	G 1/4	33,0	53,0	19	19	19
K- 07 30 25 16	G 1/2	43,0	71,0	26	26	26

## Nadomestni deli

K-ERSATZ DICHT Replacement diaphragm, seal