


K-FI AK KOH METALLBEHAE MULTIFIX MI

Activated carbon filters with metal bowl

HANSA FLEX

Lastnosti

| | |
|---------------------|---|
| vstopni tlak | Max. 16 bar |
| temperatura medija | max. 60 °C |
| temperatura okolice | Max. 60 °C |
| tesnilni material | NBR |
| filtrski vložek | Activated carbon-POM |
| ohišje | Die-cast zinc |
| Drain valve | Semi-automatic |
| preostanek olja | 0.005 mg/m3 |
| meritev pretoka | FA at P1 = 6 bar and pressure drop $\Delta p = 0.2$ bar |

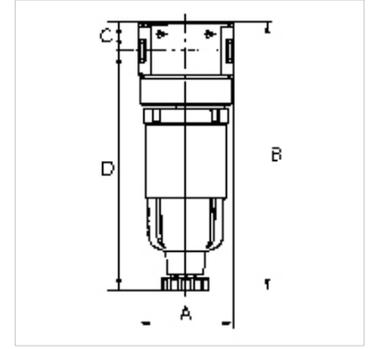

Navodilo

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
Drugi podatki na zahtevo.

Opis

Micro-filters for compliance with strict compressed air purity requirements. Suitable for all applications where standard filters do not afford the desired efficiency.

Artikel

| Opis | Navoj | pretok (L/min) | A (mm) | B | C (mm) | D (mm) | DN | Velikost |
|----------------|-------|-------------------|-----------|---------|-----------|-----------|----|----------|
| K- 07 25 10 46 | G 1/8 | 310 | 40,0 | 97,3 mm | 12,3 | 85,0 | 5 | 0 |

Nadomestni deli

| | |
|------------------------------|--|
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-ERSATZBEHAELTER MULTI MINI | Spare tank »multifix-mini« & »standard-mini« |