
K-DRV ABLD GEW C RAENDEL

Unidirectional flow control valves, outgoing air restriction (»C«), screw connection

Lastnosti

Obratovalni tlak	maks. 10 bar
območje temperatur:	0 °C to +70 °C
votli vijak, vrtljiva ročica, regulirni vijak	Nickel-plated brass
notranji deli	Brass with a bare metal surface
tesnilo z zavihkom tesnilnega obroča	NBR
tesnila (neizgubljiva)	Polyamide (glass fibre-reinforced)



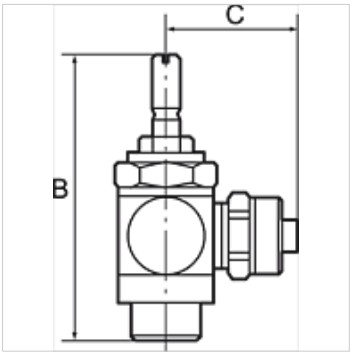

Navodilo

Drugi podatki na zahtevo.

Opis

For fine regulation of a cylinder piston speed and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder. Compact type of construction, also ideal where space is restricted. On the version with a knurled screw, the set volumetric flow rate can be locked with the hexagon nut to obtain a fixed setting.

Artikel

Opis	Priključek	C (mm)	Navoj	zev ključa	B (mm)
K- 07 15 04 57	M 5 female thread	11,5	M 5	8 mm	38,9
K- 07 15 04 62	G 1/8 female thread	16,0	G 1/8	14 mm	42,0
K- 07 15 04 58	G 1/4 female thread	22,0	G 1/4	17 mm	51,0
K- 07 15 25 14	G 1/2 female thread	32,0	G 1/2	26 mm	81,0
K- 07 15 25 15	G 3/8 female thread	26,0	G 3/8	20 mm	63,0

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.