

K-VHR 6KT 1

Hexagon head screw plugs

HANSA FLEX

Lastnosti



delovni tlak 10 bar

temperatura medija max. +90 °C

temperatura okolice Max. +90 °C

Način izdelave Zaporni vijaki, z zunanjim šestkotnim robom

Material: Brass with a bare metal surface

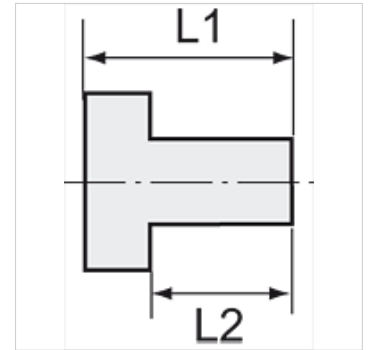

Navodilo

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Drugi podatki na zahtevo.

Dodatne informacije

Further types and dimensions on request.

Artikel

Opis	Navoj	L1 (mm)	L2 (mm)	zev ključa
K- 07 40 10 26	G 1/8	11,0	6,0	13 mm
K- 07 40 10 27	G 1/4	13,0	8,0	17 mm
K- 07 40 10 28	G 3/8	14,0	8,0	19 mm
K- 07 40 10 29	G 1/2	16,0	10,0	24 mm