

K-VHR 6KT BUND

Hexagon head screw plugs with collar

HANSA FLEX

Lastnosti


delovni tlak 10 bar

temperatura medija max. +90 °C

temperatura okolice Max. +90 °C

Način izdelave Zaporni vijaki, z zunanjim šestkotnim robom

Material: Brass with a bare metal surface

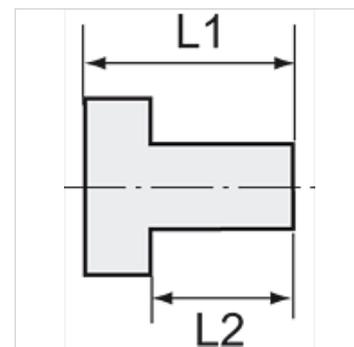

Navodilo

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Drugi podatki na zahtevo.

Dodatne informacije

Further types and dimensions on request.

Artikel

Opis	Navoj	L1 (mm)	L2 (mm)	zev ključa
K- 07 40 44 47	G 1/8	17,0	8,0	10 mm
K- 07 40 44 49	G 1/4	21,0	12,0	13 mm
K- 07 40 44 51	G 3/8	21,0	12,0	17 mm
K- 07 40 44 53	G 1/2	26,0	14,0	19 mm
K- 07 40 44 55	G 3/4	30,0	16,0	24 mm
K- 07 40 44 57	G 1	32,0	16,0	27 mm