
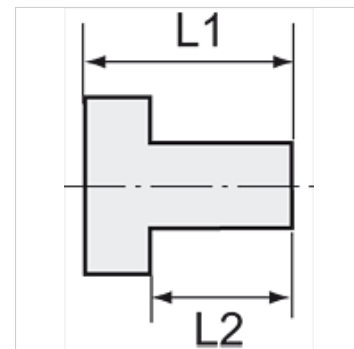


K-VHR 6KT ES

Hexagon head screw plugs

Lastnosti

| | |
|-----------------------|---|
| delovni tlak | Max. 20 bar |
| Način izdelave | Zaporni vijaki, z zunanjim šestkotnim robom |
| Material: | legirano jeklo 1.4571 |



Navodilo

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Drugi podatki na zahtevo.

Dodatne informacije

Further types and dimensions on request.

Artikel

| Opis | Navoj | L1 (mm) | L2 (mm) | zev ključa |
|----------------|-------|------------|------------|------------|
| K- 07 40 39 69 | G 1/8 | 11,0 | 6,0 | 13 mm |
| K- 07 40 39 70 | G 1/4 | 13,0 | 8,0 | 17 mm |
| K- 07 40 39 71 | G 3/8 | 14,0 | 8,0 | 19 mm |
| K- 07 40 39 72 | G 1/2 | 16,0 | 10,0 | 24 mm |
| K- 07 40 45 28 | G 3/4 | 16,0 | 11,0 | 30 mm |
| K- 07 40 44 43 | G 1 | 19,0 | 13,0 | 38 mm |