

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

HANSA FLEX

Lastnosti

območje temperatur: -20 °C to +60 °C

tlak Max. 12 bar



tlačno območje Max. 12 bar

temperatura -20 °C to +60 °C

pretok 0 - 400 l/min

vzmet Stainless-steel

ohišje Brass

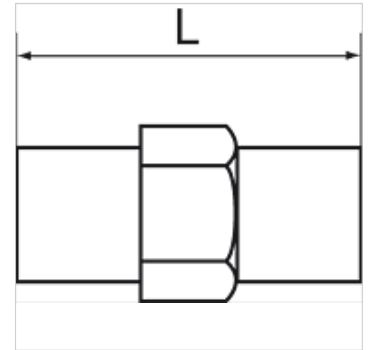

Navodilo

Drugi podatki na zahtevo.

Opis

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Artikel

| Opis | Navoj | delovni tlak, prednastavljeni | L (mm) |
|----------------|------------------|-------------------------------|-----------|
| K- 07 25 03 03 | G 1/4 außen/male | 2 bar | 24,0 |
| K- 07 25 03 04 | G 1/4 außen/male | 4 bar | 24,0 |
| K- 07 25 03 05 | G 1/4 außen/male | 6 bar | 24,0 |