


# K-BKR MINI SAFETY

Mini safety ball valves, non-lockable, with relief port - SAFETY

**HANSA FLEX**

## Lastnosti

Obratovalni tlak	0.99 - 20 bar
delovna temperatura	-20 °C to max. +80 °C
odzračevalna izvrtina	2,5
opis navoja	G thread acc. DIN EN ISO 228-1
ročica	PA 66
tesnilo krogle	PTFE
tesnilo vretena	NBR
Material:	ponikljana medenina

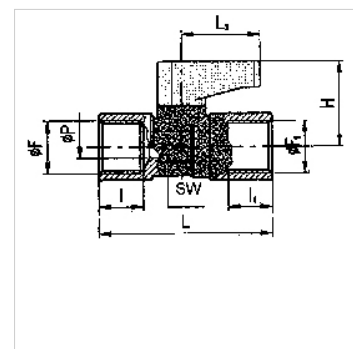

## Navodilo

Drugi podatki na zahtevo.

## Artikel

Opis	DN	Navoj	H (mm)	L (mm)	L1 (mm)	SW (mm)
K- 07 30 20 10	6	G 1/8 female	21,0	35,0	19,0	14
K- 07 30 20 11	6	G 1/4 female	21,0	37,0	19,0	14
K- 07 30 20 12	8	G 3/8 female	21,0	42,0	19,0	18