


K-WTST SAFETY BKR SCHA AN FILR MULT

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and filter regulator with lock cylinder

HANSA FLEX

| Lastnosti | |
|---------------------------------------|--|
| vstopni tlak | 2 - 16 bar |
| izhodni tlak | 0.5 - 10 bar |
| območje temperatur: | Max. 60 °C |
| Sredstva | stisnjen zrak |
| tesnilni material | NBR |
| posoda | Polycarbonate (with bayonet lock) and bowl guard |
| vzmetni pokrov | POM |
| filtrirni element | Cellpor (PE) 5 µm |
| ohišje | Die-cast zinc |
| membrana | NBR |
| Drain valve | Semi-automatic |
| meritev pretoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| drugi podatki | see data sheets of the individual components (on request) |
| odzračevalni priključek krogelna pipa | Silencer |

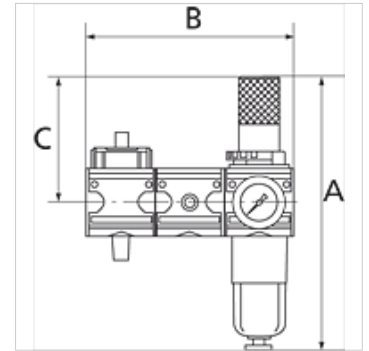

Opis

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

Navodila za naročanje

The price does not include a padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit.

Artikel

| Opis | Navoj | pretok (L/min) | A (mm) | B | C (mm) | izpust kondenzata |
|----------------|-------|----------------|--------|----------|--------|-------------------|
| K- 07 25 15 14 | G 1/4 | 1000 | 219,1 | 137,8 mm | 94,0 | Semi-automatic |
| K- 07 25 15 15 | G 1/2 | 4000 | 269,3 | 200,8 mm | 122,0 | Semi-automatic |
| K- 07 25 15 16 | G 1 | 12000 | 410,8 | 282,8 mm | 157,0 | Semi-automatic |