


# K-DRG TRINKWASSER

Pressure regulators for drinking water (without DVGW appr.), high outlet pressure (max. 12 bar)

**HANSA FLEX**

## Lastnosti

<b>vstopni tlak</b>	Max. 16 bar (low-pressure type), Max. 25 bar (high-pressure type)
<b>obrazec</b>	Min. 1.2 bar (low-pressure type), Max. 2.5 bar (high-pressure type)
<b>min. padec tlaka</b>	1 bar
<b>delovna temperatura</b>	Max. 75 °C
<b>tesnila</b>	NBR-SBR
<b>vzmetni pokrov</b>	Plastic PA 6 (up to DN 32, low-presure type), Hot-pressed brass (up to DN 32, high-pressure type), Cast iron (from DN 40)
<b>ohišje</b>	Bronze (Rg5)
<b>notranji deli</b>	Plastic, brass, stainless steel

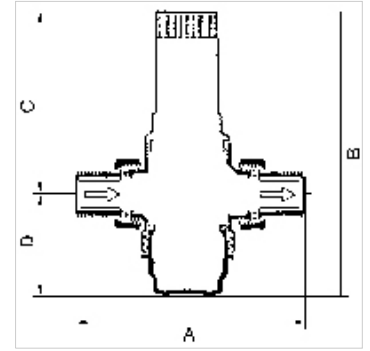

## Navodilo

Drugi podatki na zahtevo.

## Opis

Pressure regulator with pressure-reduced single-seated piston valve or single-seated diaphragm valve and built-in strainer. Specially designed for use with water. <br>The device is also suitable for all other applications involving neutral non-sticky liquids, air and neutral non-flammable gases.

## Artikel

Opis	Navoj	DN	regulacijsko območje	pretok vrednost kvs (m <sup>3</sup> /h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 45	R 1/2	15	1.5 - 12 bar	2,9	137,0	177,0 mm	150,0	27,0
K- 07 25 04 46	R 3/4	20	1.5 - 12 bar	3,9	141,0	177,0 mm	150,0	27,0
K- 07 25 04 47	R 1	25	1.5 - 12 bar	5,4	160,0	178,5 mm	150,0	28,5
K- 07 25 04 48	R 1 1/4	32	1.5 - 12 bar	6,1	177,2	234,0 mm	187,0	47,0
K- 07 25 04 49	R 1 1/2	40	1.5 - 12 bar	12,0	210,0	379,0 mm	320,0	59,0
K- 07 25 04 50	R 2	50	1.5 - 12 bar	13,0	210,0	381,0 mm	320,0	61,0

## Pribor

K-KARTUSCHEN Cartridge