


K-DRG DRV 225 HOCHDRUCK

DRV 225 pressure regulators, high-pressure type

HANSA FLEX

Lastnosti

| | |
|----------------------------|---|
| vstopni tlak | Max. 25 bar (Series 200 and 300 Series), Max. 40 bar (400 Series) |
| območje temperatur: | Max. 75 °C |
| reducirno razmerje | Max. 10:1 (200 Series), Max. 20:1 (300 Series), Max. 6:1 (400 Series) |
| tesnilni material | NBR |
| vzmetni pokrov | Pressed brass up to DN 25, Grey cast iron from DN 32 |
| ohišje | Red brass 2.1096.01 |

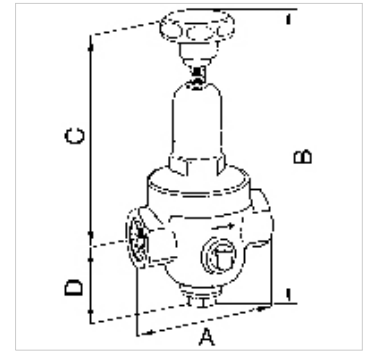

Navodilo

Drugi podatki na zahtevo.

Opis

Diaphragm pressure regulators with non-self-relieving design and non-pressure-reduced single-seated valve. Very precise adjustment. Good response characteristic because of only a few moving parts which hence minimal friction. Ideal for compressed air, nitrogen and other neutral, non-flammable gases, but only suitable for liquids with comparatively low flow rates.

Navodila za naročanje

Druge izvedbe na zahtevo

Dodatne informacije

druge izvedbe na zahtevo

Artikel

| Opis | Navoj | regulacijsko območje | pretok vrednost kvs (m ³ /h) | A (mm) | B | C (mm) | D (mm) |
|----------------|---------|----------------------|--|-----------|----------|-----------|-----------|
| K- 07 25 04 97 | G 1/4 | 1.5 - 20 bar | 0,5 | 70,0 | 188,0 mm | 141,0 | 47,0 |
| K- 07 25 04 98 | G 3/8 | 1.5 - 20 bar | 0,6 | 70,0 | 188,0 mm | 141,0 | 47,0 |
| K- 07 25 04 99 | G 1/2 | 1.5 - 20 bar | 1,2 | 85,0 | 228,5 mm | 182,0 | 46,5 |
| K- 07 25 05 00 | G 3/4 | 1.5 - 20 bar | 1,3 | 85,0 | 228,5 mm | 182,0 | 46,5 |
| K- 07 25 05 01 | G 1 | 1.5 - 20 bar | 1,6 | 95,0 | 257,0 mm | 201,0 | 56,0 |
| K- 07 25 05 02 | G 1 1/4 | 1.5 - 20 bar | 4,2 | 104,0 | 385,0 mm | 324,0 | 61,0 |
| K- 07 25 05 03 | G 1 1/2 | 1.5 - 20 bar | 4,5 | 108,0 | 392,0 mm | 331,0 | 61,0 |
| K- 07 25 05 04 | G 2 | 1.5 - 20 bar | 7,2 | 146,5 | 419,0 mm | 349,0 | 70,0 |

Nadomestni deli

K-VERSCHLEI-SATZ Set of wearing parts