


# K-3/2 ABSPERRVENTILE HW SCHL G-MINI

3/2-way shut-off valve

**HANSA FLEX**

## Lastnosti

|                         |  |
|-------------------------|--|
| vstopni tlak            | 0 - 9 bar  |
| temperatura medija      | max. 70 °C   |
| temperatura okolice     | Max. 70 °C   |
| odzračevalni priključek | G 1/4  |
| tesnilni material       | NBR  |
| ohišje                  | Die-cast aluminium   |
| klin                    | Plastic  |
| meritev pretoka         | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar |
| drugi podatki           | User manual on request   |

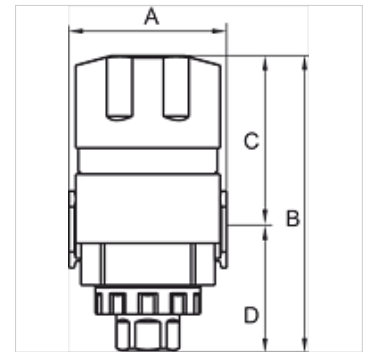

## Artikel

| Opis           | Navoj | pretok<br>(L/min) | A<br>(mm) | B       | C<br>(mm) | D<br>(mm) | Velikost |
|----------------|-------|-------------------|-----------|---------|-----------|-----------|----------|
| K- 07 25 12 29 | G 1/8 | 1750              | 38,0      | 89,0 mm | 52,5      | 36,5      | 200      |
| K- 07 25 12 30 | G 1/4 | 1750              | 38,0      | 89,0 mm | 52,5      | 36,5      | 200      |

## Pribor

|                       |                 |
|-----------------------|-----------------|
| K-VERBINDUNGSELEMENTE | Connecting sets |
| K-WANDHALTER          | Wall bracket    |
| K-HALTERBAUSATZ       | Holder          |