



# K-XRD STECKANSCHLUSS Z SCH AGR OR

Straight non-return valves, flow direction from port to tube, parallel male thread with O-ring

**HANSA FLEX**

## Lastnosti

delovni tlak	Max. 10 bar, vacuum
Območje uporabe	Air, vacuum
priporočene cevi	PU or PA (nylon)
Sredstva	stisnjen zrak
Standard	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring
območje temperatur:	0 °C to +60 °C
tesnilna ploskev	O-ring (NBR)
Material:	Plastic, Nickel plated brass
potisni obroč	Plastic

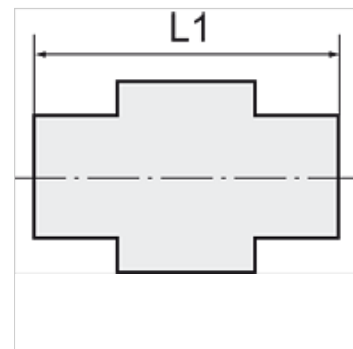

## Navodilo

Drugi podatki na zahtevo.

## Opis

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Artikel

Opis	Navoj	za zunanji Ø mm cevi	L1 (mm)	Tlak odprtja (bar)	zev ključa
K- 07 40 08 73	M 5	4 mm	31,0	0,2	10 mm
K- 07 40 08 68	G 1/8	4 mm	24,2	0,2	14 mm
K- 07 40 08 69	G 1/8	6 mm	31,0	0,2	14 mm
K- 07 40 08 70	G 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 66	G 1/4	6 mm	33,0	0,2	17 mm
K- 07 40 08 67	G 1/4	8 mm	34,8	0,2	17 mm
K- 07 40 08 71	G 3/8	10 mm	41,0	0,2	20 mm
K- 07 40 08 72	G 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 64	G 1/2	10 mm	43,0	0,2	24 mm
K- 07 40 08 65	G 1/2	12 mm	44,5	0,2	24 mm