

# K-STECKVERBINDU ST RED M

Reducers with push-in plug, mini

**HANSA FLEX**

## Lastnosti

**delovni tlak** Max. 10 bar, vacuum

**Območje uporabe** Air, vacuum


**priporočene cevi** PU or PA (nylon)

**Sredstva** stisnjen zrak

**območje temperatur:** 0 °C to +60 °C

**Material:** Plastic, Nickel plated brass

**potisni obroč** Plastic

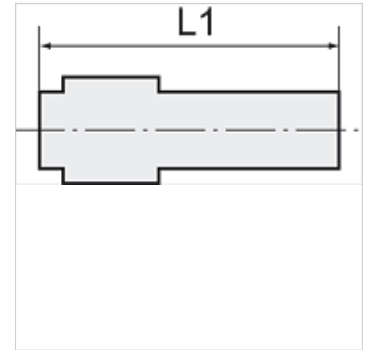

## Navodilo

Drugi podatki na zahtevo.

## Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

## Artikel

Opis	za zunanji Ø mm cevi	L1 (mm)
K- 07 40 50 13	4 mm / 3 mm	28,8
K- 07 40 50 14	6 mm / 4 mm	32,2