K-RUNDZYLINDER DOPP O E D MI


Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

HANSA FLEX

Lastnosti

Sredstva	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
delovni tlak	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
območje temperatur:	-20 °C to +70 °C
batnica	Stainless steel 1.4301
Izvedba	Type "CA" = ground cover with threaded pin - swivel design Type "CM" = ground cover with threaded pin round - swivel design
bat	Stainless steel 1.4305 (8 to 12 mm); Alu (16 to 40 mm)
tesnilni material	NBR
cev za valj	Stainless steel 1.4301



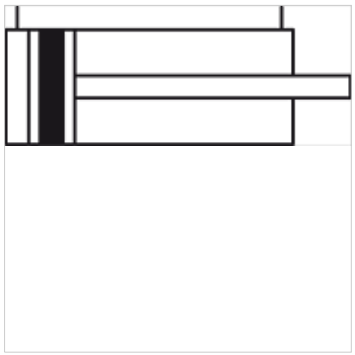

Navodilo

Drugi podatki na zahtevo.

Opis

Circular cylinder in stainless steel in different versions: Series "MI" double-acting, Ø 8 – 25 in accordance with ISO 6432
Series "MI" double-acting, Ø 32 - 40

Artikel

Opis	Ø bata	Hod (mm)	Izvedba	Ø batnice (mm)	zunanji navoj batnice
K- 07 15 17 90	8 mm	10	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 91	8 mm	15	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 92	8 mm	20	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 93	8 mm	25	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 94	8 mm	30	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 95	8 mm	40	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 96	8 mm	50	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 97	8 mm	60	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 98	8 mm	75	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 99	8 mm	80	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 00	8 mm	100	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 01	8 mm	125	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 02	8 mm	150	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 03	10 mm	10	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 04	10 mm	15	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 05	10 mm	20	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 06	10 mm	25	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 07	10 mm	30	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 08	10 mm	40	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 09	10 mm	50	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 10	10 mm	60	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 11	10 mm	75	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 12	10 mm	80	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 13	10 mm	100	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 14	10 mm	125	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 15	10 mm	150	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 16	10 mm	160	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 17	10 mm	175	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 18	10 mm	200	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 19	12 mm	10	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 20	12 mm	15	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 21	12 mm	20	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 22	12 mm	25	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 23	12 mm	30	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 24	12 mm	40	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 25	12 mm	50	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 26	12 mm	60	»CA« type, acc. to ISO 6432	6	M 6 x 1

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

HANSA-FLEX

Artikel

Opis	Ø bata	Hod (mm)	Izvedba	Ø batnice (mm)	zunanji navoj batnice
K- 07 15 18 27	12 mm	75	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 28	12 mm	80	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 29	12 mm	100	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 30	12 mm	125	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 31	12 mm	150	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 32	12 mm	160	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 33	12 mm	175	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 34	12 mm	200	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 35	12 mm	250	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 36	16 mm	10	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 37	16 mm	15	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 38	16 mm	20	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 39	16 mm	25	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 40	16 mm	30	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 41	16 mm	40	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 42	16 mm	50	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 43	16 mm	60	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 44	16 mm	75	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 45	16 mm	80	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 46	16 mm	100	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 47	16 mm	125	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 48	16 mm	150	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 49	16 mm	160	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 50	16 mm	175	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 51	16 mm	200	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 52	16 mm	250	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 53	16 mm	300	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 54	20 mm	10	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 55	20 mm	15	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 56	20 mm	20	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 57	20 mm	25	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 58	20 mm	30	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 59	20 mm	40	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 60	20 mm	50	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 61	20 mm	60	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 62	20 mm	75	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 63	20 mm	80	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 64	20 mm	100	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 65	20 mm	125	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 66	20 mm	150	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 67	20 mm	160	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 68	20 mm	175	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 69	20 mm	200	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 70	20 mm	250	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 71	20 mm	300	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 72	20 mm	350	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 73	20 mm	400	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 74	20 mm	450	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 75	20 mm	500	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 76	20 mm	600	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 77	25 mm	10	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 78	25 mm	15	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 79	25 mm	20	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 80	25 mm	25	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 81	25 mm	30	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 82	25 mm	40	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 83	25 mm	50	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 84	25 mm	60	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 85	25 mm	75	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 86	25 mm	80	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 87	25 mm	100	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 88	25 mm	125	»CA« type, acc. to ISO 6432	10	M 10 x 1.25

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

HANSA-FLEX

Artikel

Opis	Ø bata	Hod (mm)	Izvedba	Ø batnice (mm)	zunanji navoj batnice
K- 07 15 18 89	25 mm	150	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 90	25 mm	160	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 91	25 mm	175	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 92	25 mm	200	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 93	25 mm	250	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 94	25 mm	300	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 95	25 mm	350	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 96	25 mm	400	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 97	25 mm	450	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 98	25 mm	500	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 99	25 mm	600	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 19 00	32 mm	10	»CM« type	12	M 10 x 1.25
K- 07 15 19 01	32 mm	15	»CM« type	12	M 10 x 1.25
K- 07 15 19 02	32 mm	20	»CM« type	12	M 10 x 1.25
K- 07 15 19 03	32 mm	25	»CM« type	12	M 10 x 1.25
K- 07 15 19 04	32 mm	30	»CM« type	12	M 10 x 1.25
K- 07 15 19 05	32 mm	40	»CM« type	12	M 10 x 1.25
K- 07 15 19 06	32 mm	50	»CM« type	12	M 10 x 1.25
K- 07 15 19 07	32 mm	60	»CM« type	12	M 10 x 1.25
K- 07 15 19 08	32 mm	75	»CM« type	12	M 10 x 1.25
K- 07 15 19 09	32 mm	80	»CM« type	12	M 10 x 1.25
K- 07 15 19 10	32 mm	100	»CM« type	12	M 10 x 1.25
K- 07 15 19 11	32 mm	125	»CM« type	12	M 10 x 1.25
K- 07 15 19 12	32 mm	150	»CM« type	12	M 10 x 1.25
K- 07 15 19 13	32 mm	160	»CM« type	12	M 10 x 1.25
K- 07 15 19 14	32 mm	175	»CM« type	12	M 10 x 1.25
K- 07 15 19 15	32 mm	200	»CM« type	12	M 10 x 1.25
K- 07 15 19 16	32 mm	250	»CM« type	12	M 10 x 1.25
K- 07 15 19 17	32 mm	300	»CM« type	12	M 10 x 1.25
K- 07 15 19 18	32 mm	350	»CM« type	12	M 10 x 1.25
K- 07 15 19 19	32 mm	400	»CM« type	12	M 10 x 1.25
K- 07 15 19 20	32 mm	450	»CM« type	12	M 10 x 1.25
K- 07 15 19 21	32 mm	500	»CM« type	12	M 10 x 1.25
K- 07 15 19 22	32 mm	600	»CM« type	12	M 10 x 1.25
K- 07 15 19 23	40 mm	10	»CM« type	16	M 12 x 1.25
K- 07 15 19 24	40 mm	15	»CM« type	16	M 12 x 1.25
K- 07 15 19 25	40 mm	20	»CM« type	16	M 12 x 1.25
K- 07 15 19 26	40 mm	25	»CM« type	16	M 12 x 1.25
K- 07 15 19 27	40 mm	30	»CM« type	16	M 12 x 1.25
K- 07 15 19 28	40 mm	40	»CM« type	16	M 12 x 1.25
K- 07 15 19 29	40 mm	50	»CM« type	16	M 12 x 1.25
K- 07 15 19 30	40 mm	60	»CM« type	16	M 12 x 1.25
K- 07 15 19 31	40 mm	75	»CM« type	16	M 12 x 1.25
K- 07 15 19 32	40 mm	80	»CM« type	16	M 12 x 1.25
K- 07 15 19 33	40 mm	100	»CM« type	16	M 12 x 1.25
K- 07 15 19 34	40 mm	125	»CM« type	16	M 12 x 1.25
K- 07 15 19 35	40 mm	150	»CM« type	16	M 12 x 1.25
K- 07 15 19 36	40 mm	160	»CM« type	16	M 12 x 1.25
K- 07 15 19 37	40 mm	175	»CM« type	16	M 12 x 1.25
K- 07 15 19 38	40 mm	200	»CM« type	16	M 12 x 1.25
K- 07 15 19 39	40 mm	250	»CM« type	16	M 12 x 1.25
K- 07 15 19 40	40 mm	300	»CM« type	16	M 12 x 1.25
K- 07 15 19 41	40 mm	350	»CM« type	16	M 12 x 1.25
K- 07 15 19 42	40 mm	400	»CM« type	16	M 12 x 1.25
K- 07 15 19 43	40 mm	450	»CM« type	16	M 12 x 1.25
K- 07 15 19 44	40 mm	500	»CM« type	16	M 12 x 1.25
K- 07 15 19 45	40 mm	600	»CM« type	16	M 12 x 1.25

Pribor

K-FUSSBEFESTIGUNG TYP LB 1	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA3	Flange model, »FA« type
K-SCHWENKLAGER TYP SDB	Counter-hinge model, »SDB« type

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.