


# K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

**HANSA FLEX**

## Lastnosti

<b>Sredstva</b>	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
<b>delovni tlak</b>	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
<b>območje temperatur:</b>	-20 °C to +70 °C
<b>batnica</b>	Stainless steel 1.4301
<b>Izvedba</b>	Type "CA" = ground cover with threaded pin - swivel design Type "CM" = ground cover with threaded pin round - swivel design
<b>bat</b>	Stainless steel 1.4305 (8 to 12 mm); Alu (16 to 40 mm)
<b>tesnilni material</b>	NBR
<b>cev za valj</b>	Stainless steel 1.4301

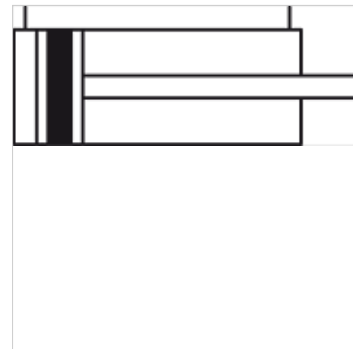

## Navodilo

Drugi podatki na zahtevo.

## Opis

Circular cylinder in stainless steel in different versions: Series "MI" double-acting, Ø 8 – 25 in accordance with ISO 6432  
Series "MI" double-acting, Ø 32 - 40

## Artikel

Opis	Ø bata	Hod (mm)	Izvedba	Ø batnice (mm)	zunanji navoj batnice
K- 07 15 17 90	8 mm	10	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 91	8 mm	15	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 92	8 mm	20	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 93	8 mm	25	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 94	8 mm	30	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 95	8 mm	40	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 96	8 mm	50	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 97	8 mm	60	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 98	8 mm	75	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 99	8 mm	80	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 00	8 mm	100	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 01	8 mm	125	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 02	8 mm	150	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 03	10 mm	10	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 04	10 mm	15	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 05	10 mm	20	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 06	10 mm	25	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 07	10 mm	30	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 08	10 mm	40	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 09	10 mm	50	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 10	10 mm	60	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 11	10 mm	75	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 12	10 mm	80	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 13	10 mm	100	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 14	10 mm	125	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 15	10 mm	150	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 16	10 mm	160	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 17	10 mm	175	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 18	10 mm	200	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 19	12 mm	10	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 20	12 mm	15	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 21	12 mm	20	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 22	12 mm	25	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 23	12 mm	30	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 24	12 mm	40	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 25	12 mm	50	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 26	12 mm	60	»CA« type, acc. to ISO 6432	6	M 6 x 1



Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

11.02.2025

HANSA-FLEX AG

www.hansa-flex.com

1

# K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

**HANSA FLEX**

Artikel	Opis	Ø bata	Hod (mm)	Izvedba	Ø batnice (mm)	zunani navoj batnice
K- 07 15 18 27		12 mm	75	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 28		12 mm	80	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 29		12 mm	100	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 30		12 mm	125	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 31		12 mm	150	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 32		12 mm	160	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 33		12 mm	175	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 34		12 mm	200	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 35		12 mm	250	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 36		16 mm	10	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 37		16 mm	15	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 38		16 mm	20	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 39		16 mm	25	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 40		16 mm	30	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 41		16 mm	40	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 42		16 mm	50	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 43		16 mm	60	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 44		16 mm	75	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 45		16 mm	80	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 46		16 mm	100	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 47		16 mm	125	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 48		16 mm	150	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 49		16 mm	160	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 50		16 mm	175	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 51		16 mm	200	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 52		16 mm	250	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 53		16 mm	300	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 54		20 mm	10	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 55		20 mm	15	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 56		20 mm	20	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 57		20 mm	25	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 58		20 mm	30	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 59		20 mm	40	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 60		20 mm	50	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 61		20 mm	60	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 62		20 mm	75	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 63		20 mm	80	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 64		20 mm	100	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 65		20 mm	125	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 66		20 mm	150	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 67		20 mm	160	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 68		20 mm	175	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 69		20 mm	200	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 70		20 mm	250	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 71		20 mm	300	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 72		20 mm	350	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 73		20 mm	400	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 74		20 mm	450	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 75		20 mm	500	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 76		20 mm	600	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 77		25 mm	10	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 78		25 mm	15	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 79		25 mm	20	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 80		25 mm	25	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 81		25 mm	30	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 82		25 mm	40	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 83		25 mm	50	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 84		25 mm	60	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 85		25 mm	75	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 86		25 mm	80	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 87		25 mm	100	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 88		25 mm	125	»CA« type, acc. to ISO 6432	10	M 10 x 1.25



Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

11.02.2025

HANSA-FLEX AG

www.hansa-flex.com

# K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

**HANSA FLEX**

## Artikel

Opis	Ø bata	Hod (mm)	Izvedba	Ø batnice (mm)	zunani navoj batnice
K- 07 15 18 89	25 mm	150	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 90	25 mm	160	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 91	25 mm	175	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 92	25 mm	200	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 93	25 mm	250	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 94	25 mm	300	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 95	25 mm	350	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 96	25 mm	400	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 97	25 mm	450	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 98	25 mm	500	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 99	25 mm	600	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 19 00	32 mm	10	»CM« type	12	M 10 x 1.25
K- 07 15 19 01	32 mm	15	»CM« type	12	M 10 x 1.25
K- 07 15 19 02	32 mm	20	»CM« type	12	M 10 x 1.25
K- 07 15 19 03	32 mm	25	»CM« type	12	M 10 x 1.25
K- 07 15 19 04	32 mm	30	»CM« type	12	M 10 x 1.25
K- 07 15 19 05	32 mm	40	»CM« type	12	M 10 x 1.25
K- 07 15 19 06	32 mm	50	»CM« type	12	M 10 x 1.25
K- 07 15 19 07	32 mm	60	»CM« type	12	M 10 x 1.25
K- 07 15 19 08	32 mm	75	»CM« type	12	M 10 x 1.25
K- 07 15 19 09	32 mm	80	»CM« type	12	M 10 x 1.25
K- 07 15 19 10	32 mm	100	»CM« type	12	M 10 x 1.25
K- 07 15 19 11	32 mm	125	»CM« type	12	M 10 x 1.25
K- 07 15 19 12	32 mm	150	»CM« type	12	M 10 x 1.25
K- 07 15 19 13	32 mm	160	»CM« type	12	M 10 x 1.25
K- 07 15 19 14	32 mm	175	»CM« type	12	M 10 x 1.25
K- 07 15 19 15	32 mm	200	»CM« type	12	M 10 x 1.25
K- 07 15 19 16	32 mm	250	»CM« type	12	M 10 x 1.25
K- 07 15 19 17	32 mm	300	»CM« type	12	M 10 x 1.25
K- 07 15 19 18	32 mm	350	»CM« type	12	M 10 x 1.25
K- 07 15 19 19	32 mm	400	»CM« type	12	M 10 x 1.25
K- 07 15 19 20	32 mm	450	»CM« type	12	M 10 x 1.25
K- 07 15 19 21	32 mm	500	»CM« type	12	M 10 x 1.25
K- 07 15 19 22	32 mm	600	»CM« type	12	M 10 x 1.25
K- 07 15 19 23	40 mm	10	»CM« type	16	M 12 x 1.25
K- 07 15 19 24	40 mm	15	»CM« type	16	M 12 x 1.25
K- 07 15 19 25	40 mm	20	»CM« type	16	M 12 x 1.25
K- 07 15 19 26	40 mm	25	»CM« type	16	M 12 x 1.25
K- 07 15 19 27	40 mm	30	»CM« type	16	M 12 x 1.25
K- 07 15 19 28	40 mm	40	»CM« type	16	M 12 x 1.25
K- 07 15 19 29	40 mm	50	»CM« type	16	M 12 x 1.25
K- 07 15 19 30	40 mm	60	»CM« type	16	M 12 x 1.25
K- 07 15 19 31	40 mm	75	»CM« type	16	M 12 x 1.25
K- 07 15 19 32	40 mm	80	»CM« type	16	M 12 x 1.25
K- 07 15 19 33	40 mm	100	»CM« type	16	M 12 x 1.25
K- 07 15 19 34	40 mm	125	»CM« type	16	M 12 x 1.25
K- 07 15 19 35	40 mm	150	»CM« type	16	M 12 x 1.25
K- 07 15 19 36	40 mm	160	»CM« type	16	M 12 x 1.25
K- 07 15 19 37	40 mm	175	»CM« type	16	M 12 x 1.25
K- 07 15 19 38	40 mm	200	»CM« type	16	M 12 x 1.25
K- 07 15 19 39	40 mm	250	»CM« type	16	M 12 x 1.25
K- 07 15 19 40	40 mm	300	»CM« type	16	M 12 x 1.25
K- 07 15 19 41	40 mm	350	»CM« type	16	M 12 x 1.25
K- 07 15 19 42	40 mm	400	»CM« type	16	M 12 x 1.25
K- 07 15 19 43	40 mm	450	»CM« type	16	M 12 x 1.25
K- 07 15 19 44	40 mm	500	»CM« type	16	M 12 x 1.25
K- 07 15 19 45	40 mm	600	»CM« type	16	M 12 x 1.25

## Pribor

K-FUSSBEFESTIGUNG TYP LB 1	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA3	Flange model, »FA« type
K-SCHWENKLAGER TYP SDB	Counter-hinge model, »SDB« type



Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

11.02.2025

HANSA-FLEX AG

www.hansa-flex.com

3

# K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI«  
Series

**HANSA FLEX**

---