


K-NEBELOELER PC-BEHAEALTER HW G-MINI

Oil-mist lubricators

HANSA FLEX

Lastnosti

| | |
|----------------------------|--|
| vstopni tlak | Max. 10 bar |
| temperatura medija | max. 70 °C |
| temperatura okolice | Max. 70 °C |
| delovni tlak | 0.5 - 9 bar |
| tesnilni material | NBR |
| vzmetni pokrov | POM |
| ohišje | Die-cast aluminium |
| kapalni nastavek | Brass/POM |
| meritev pretoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| drugi podatki | User manual on request |

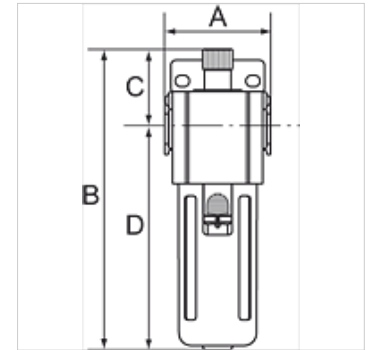

Artikel

| Opis | Navoj | pretok (L/min) | A (mm) | B | C (mm) | D (mm) | Velikost |
|----------------|-------|-------------------|-----------|----------|-----------|-----------|----------|
| K- 07 25 08 75 | G 1/8 | 1950 | 38,0 | 119,0 mm | 39,0 | 80,0 | 200 |
| K- 07 25 08 76 | G 1/4 | 1950 | 38,0 | 119,0 mm | 39,0 | 80,0 | 200 |

Pribor

| | |
|-------------------------------------|---|
| K-ERSATZBEHAELTER G UND G-MINI POLY | Spare tanks »G« Series and »G- mini« Series Polycarbonat |
| K-HALTERBAUSATZ | Holder |
| K-VERBINDUNGELEMENTE | Connecting sets |
| K-WANDHALTER | Wall bracket |