
K-T-VB PP
Union tees

Lastnosti

delovni tlak	on request
delovna temperatura	Max. +20 °C
Material:	Polypropylene (PP)
tesnilni material	NBR



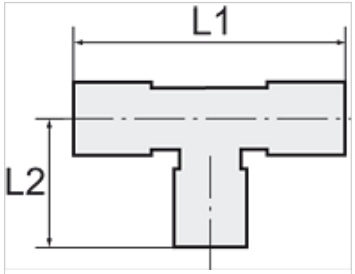

Navodilo

Drugi podatki na zahtevo.

Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikel

Opis	za zunanji Ø mm cevi	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.