

K-SV POM
Bulkhead connectors

Lastnosti

delovni tlak	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
delovna temperatura	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Material:	Acetalpolymerisat (POM)
tesnilni material	NBR



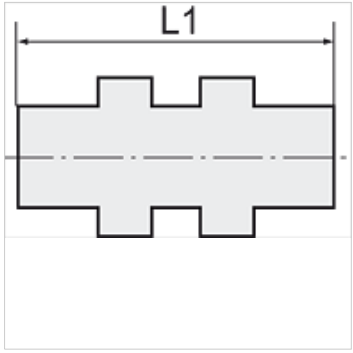

Navodilo

Drugi podatki na zahtevo.

Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikel

Opis	Navoj	za zunanji Ø mm cevi	L1 (mm)	zev ključa
K- 07 40 28 77	G 3/8	6 mm	36,5	19 mm
K- 07 40 28 76	G 1/2	8 mm	42,0	22 mm

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.