
K-T-RED VERBINDER POM

Union tees, unequal

Lastnosti

delovni tlak	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
delovna temperatura	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Material:	Acetalpolymerisat (POM)
tesnilni material	NBR



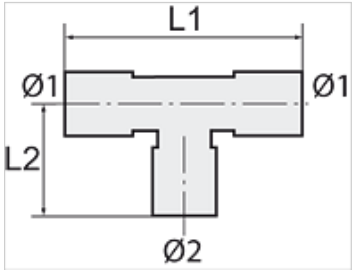

Navodilo

Drugi podatki na zahtevo.

Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikel

Opis	za zunanji Ø1 cevi (mm)	za zunanji Ø2 cevi (mm)	L1 (mm)	L2 (mm)
K- 07 40 28 74	18	15	87,0	40,0
K- 07 40 28 75	22	15	90,0	42,0

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.