

# K-BKR MINI VA AG

Mini ball valves, stainless steel, 2 x male thread

**HANSA FLEX**

## Lastnosti

Obratovalni tlak max. 64 bar

delovna temperatura -20 °C to +120 °C


tesnilo FKM (FPM)

ohišje Stainless steel 1.4401 (AISI 316)

ročica Aluminium

tesnilo krogle PTFE

vreteno Stainless steel 1.4401 (AISI 316)

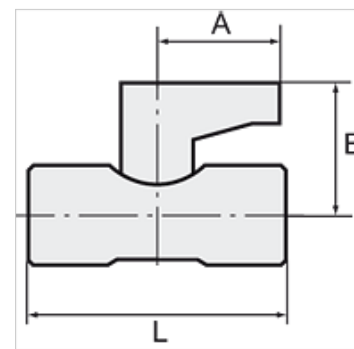

## Navodilo

Drugi podatki na zahtevo.

## Artikel

| Opis           | DN | Navoj | A<br>(mm) | B<br>(mm) | L<br>(mm) |
|----------------|----|-------|-----------|-----------|-----------|
| K- 07 30 20 19 | 7  | G 1/4 | 22,8      | 26,5      | 50,0      |
| K- 07 30 20 20 | 7  | G 3/8 | 22,8      | 26,5      | 50,0      |
| K- 07 30 20 21 | 9  | G 1/2 | 22,8      | 28,3      | 58,0      |