



K-DRG TRINKWASSER DVGW N EN 1567

Pressure regulators for drinking water, DVGW-tested acc. to EN 1567

HANSA FLEX

Lastnosti

vstopni tlak	Max. 16 bar
obrazec	Min. 2.5 bar
min. padec tlaka	1 bar
delovna temperatura	Max. 75 °C
tesnila	NBR-SBR
vzmetni pokrov	PA 6 (up to DN 32), grey cast iron (from DN 40)
ohišje	Bronze (Rg5)
notranji deli	Plastic, brass, stainless steel
membrana	NBR
drugi podatki	DVGW Zertifikat

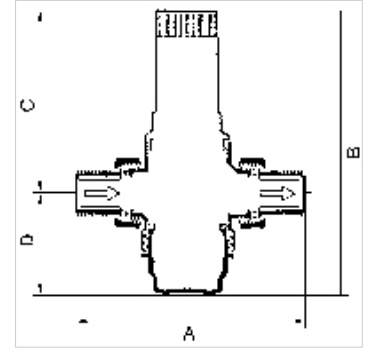

Navodilo

Drugi podatki na zahtevo.

Opis

Pressure regulator with pressure-reduced single-seated diaphragm valve and built-in strainer. Specially designed for use in domestic water installations. R 1/2 to R 1 1/4 port sizes are DVGW-tested according to EN 1567.
Regulators with an R 1 1/2 or R 2 port are not DVGW approved. The device is also suitable for all other applications involving water, neutralnon-sticky liquids, air and neutral non-flammable gases.

Artikel

Opis	Navoj	DN	regulacijsko območje	pretok vrednost kvs (m ³ /h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 39	R 1/2	15	1.5 - 6 bar	2,9	137,0	131,0 mm	104,0	27,0
K- 07 25 04 40	R 3/4	20	1.5 - 6 bar	3,9	141,0	136,6 mm	109,0	27,6
K- 07 25 04 41	R 1	25	1.5 - 6 bar	5,4	161,0	136,3 mm	107,0	29,3
K- 07 25 04 42	R 1 1/4	32	1.5 - 6 bar	6,1	177,0	151,5 mm	109,0	42,5
K- 07 25 04 43	R 1 1/2	40	1.5 - 6 bar	9,0	210,0	294,0 mm	243,0	51,0
K- 07 25 04 44	R 2	50	1.5 - 6 bar	13,0	210,0	294,0 mm	241,0	53,0

Pribor

K-KARTUSCHEN Cartridge