
K-RD DURCHGANGSFORM LEI VA

Check valve - straight-way type, lightweight series, stainless steel

Lastnosti

Obratovalni tlak	2 - 16 bar
delovna temperatura	-20 °C to +150 °C
tlak odprtja	min. 0.03 bar
tesnilni material	FKM
vzmet	Stainless steel 1.4301
ohišje	Stainless steel 1.4301



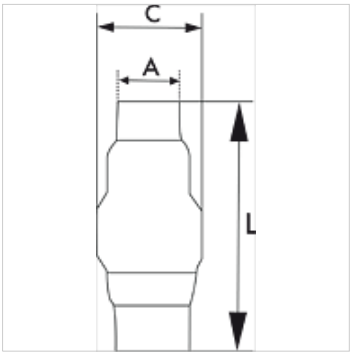

Navodilo

Drugi podatki na zahtevo.

Opis

Stainless steel check valve with full bore and very low opening pressure, no maintenance required. Applications: Compressed air, water, neutral gases, gaseous and liquid non-corrosive media, oils.

Artikel

Opis	Navoj	A (mm)	C (mm)	L (mm)
K- 07 30 29 23	G 1/4	20,0	32,0	55,9
K- 07 30 29 28	G 3/8	20,0	32,0	56,0
K- 07 30 29 22	G 1/2	25,0	32,0	55,6
K- 07 30 29 27	G 3/4	29,0	44,0	66,7
K- 07 30 29 19	G 1	36,0	53,0	83,6
K- 07 30 29 21	G 1 1/4	45,0	62,0	96,0
K- 07 30 29 20	G 1 1/2	51,0	78,0	114,0
K- 07 30 29 24	G 2	64,0	89,0	120,5
K- 07 30 29 25	G 2 1/2	80,0	113,0	141,5
K- 07 30 29 26	G 3	94,0	132,0	160,0

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.