
K-WTEH SERIE ONE M DRS

Service units, »ONE« Series, with pressure switch

Lastnosti

vstopni tlak	Max. 10 bar
območje temperatur:	-10 °C to +50 °C
Sredstva	stisnjen zrak
razred zaščite	IP 65
delovni tlak	0.5 - 8 bar
tlačno stikalo	Changeover contact
velikost por v filtrirnem elementu	20 µm
meritev pretoka	At 6,3 bar and Δp = 1 bar



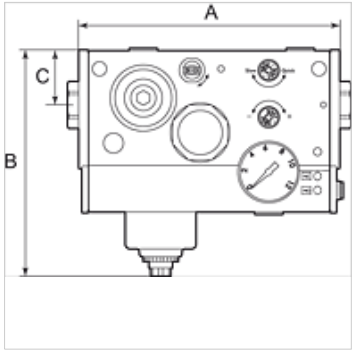

Navodilo

Drugi podatki na zahtevo.

Opis

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

Navodila za naročanje

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

Artikel

Opis	Priključek	pretok (L/min)	A (mm)	B	C (mm)	Napetost
K- 07 25 13 82	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 83	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 84	G 1/2	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.