

K-VSTO POM
Plugs

HANSA-FLEX

Lastnosti

delovni tlak	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
delovna temperatura	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Material:	Acetalpolymerisat (POM)
tesnilni material	NBR



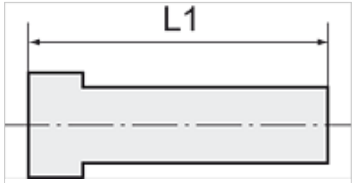

Navodilo

Drugi podatki na zahtevo.

Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikel

Opis	Barva	L1 (mm)	nastavek (mm)
K- 07 40 29 11	rdeče	28,0	4
K- 07 40 29 12	rdeče	28,0	5
K- 07 40 29 13	rdeče	30,0	6
K- 07 40 29 14	rdeče	31,0	8
K- 07 40 29 15	rdeče	36,5	10
K- 07 40 29 16	rdeče	38,5	12
K- 07 40 29 17	črno	45,0	15
K- 07 40 29 18	črno	41,5	18
K- 07 40 29 19	črno	45,0	22
K- 07 40 29 20	črno	56,0	28

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.