
# K-RD STUECKE PP

Reducers

## Lastnosti

| | |
|---|---|
| **delovni tlak** | on request |
| **delovna temperatura** | Max. +20 °C |
| **Material:** | Polypropylene (PP) |
| **tesnilni material** | NBR |



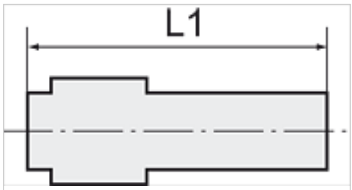


## Navodilo

Drugi podatki na zahtevo.

## Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Artikel

| Opis | za zunanji Ø mm cevi | L1 (mm) | nastavek (mm) |
|---|---|---|---|
| **K- 07 40 29 00** | 22 mm | 127,0 | 32 |
| **K- 07 40 29 01** | 28 mm | 133,3 | 32 |

*Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.*