


# K-RD STUECKE PP

Reducers

**HANSA FLEX**

## Lastnosti

delovni tlak	on request
delovna temperatura	Max. +20 °C
Material:	Polypropylene (PP)
tesnilni material	NBR

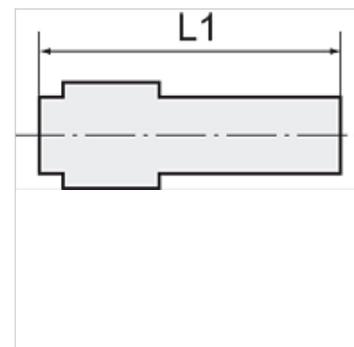

## Navodilo

Drugi podatki na zahtevo.

## Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Artikel

Opis	za zunanji Ø mm cevi	L1 (mm)	nastavek (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32