

K-STECKVERBINDU MINI

Unions, mini

HANSA FLEX

Lastnosti

delovni tlak Max. 10 bar, vacuum

Območje uporabe Air, vacuum



priporočene cevi PU or PA (nylon)

Sredstva stisnjen zrak

območje temperatur: 0 °C to +60 °C

Material: Plastic, Nickel plated brass

potisni obroč Plastic

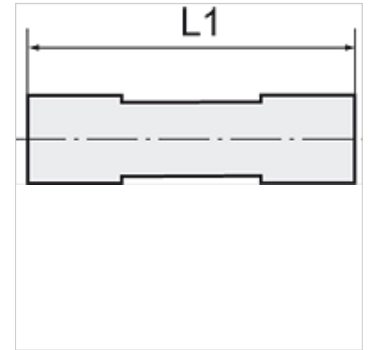

Navodilo

Drugi podatki na zahtevo.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Artikel

Opis	za zunanji Ø mm cevi	L1 (mm)
K- 07 40 23 81	3 mm	21,0
K- 07 40 23 82	4 mm	26,5
K- 07 40 23 83	6 mm	27,5