


# K-STECKVERBINDU MINI

Unions, mini

**HANSA FLEX**

## Lastnosti

delovni tlak	Max. 10 bar, vacuum
Območje uporabe	Air, vacuum
priporočene cevi	PU or PA (nylon)
Sredstva	stisnjen zrak
območje temperatur:	0 °C to +60 °C
Material:	Plastic, Nickel plated brass
potisni obroč	Plastic

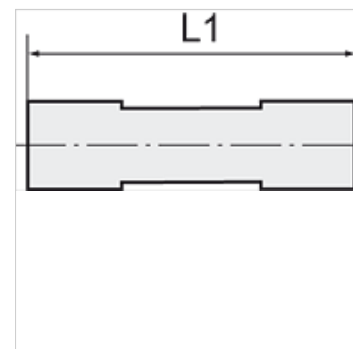

## Navodilo

Drugi podatki na zahtevo.

## Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

## Artikel

Opis	za zunanji Ø mm cevi	L1 (mm)
K- 07 40 23 81	3 mm	21,0
K- 07 40 23 82	4 mm	26,5
K- 07 40 23 83	6 mm	27,5