


# K-KURZH ZYL EINFACHW SER ASQ

Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series

**HANSA FLEX**

## Lastnosti

|                            |   |
|----------------------------|---|
| <b>Sredstva</b>            | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| <b>delovni tlak</b>        | 1 - 10 bar (double-acting); 2 - 10 bar (single-acting)  |
| <b>območje temperatur:</b> | -20 °C to +80 °C  |
| <b>batnica</b>             | Hardened steel, thick-chromed   |
| <b>bat</b>                 | Brass (12 to 16 mm); Aluminium (20 to 100 mm)   |
| <b>tesnilni material</b>   | NBR   |
| <b>cev za valj</b>         | Aluminium   |

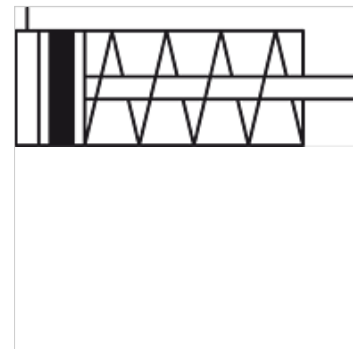

## Opis

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100  
Series "ASQ", single-acting, Ø 12 - 63

## Dodatne informacije

Important: The scope of supply does not include a connector. Please order separately.  
Other piston-Ø and stroke versions available on request.

## Artikel

| Opis           | Ø bata | Hod (mm) | izvedba | Ø batnice (mm) | navoj znotraj batnica |
|----------------|--------|----------|---------|----------------|-----------------------|
| K- 07 15 13 33 | 12 mm  | 5        | 4       | 6              | M 3 x 0.5             |
| K- 07 15 13 34 | 12 mm  | 10       | 4       | 6              | M 3 x 0.5             |
| K- 07 15 13 35 | 12 mm  | 15       | 4       | 6              | M 3 x 0.5             |
| K- 07 15 13 36 | 12 mm  | 20       | 4       | 6              | M 3 x 0.5             |
| K- 07 15 13 37 | 16 mm  | 5        | 4       | 8              | M 4 x 0.7             |
| K- 07 15 13 38 | 16 mm  | 10       | 4       | 8              | M 4 x 0.7             |
| K- 07 15 13 39 | 16 mm  | 15       | 4       | 8              | M 4 x 0.7             |
| K- 07 15 13 40 | 16 mm  | 20       | 4       | 8              | M 4 x 0.7             |
| K- 07 15 13 41 | 20 mm  | 5        | 5       | 10             | M 5 x 0.8             |
| K- 07 15 13 42 | 20 mm  | 10       | 5       | 10             | M 5 x 0.8             |
| K- 07 15 13 43 | 20 mm  | 15       | 5       | 10             | M 5 x 0.8             |
| K- 07 15 13 44 | 20 mm  | 20       | 5       | 10             | M 5 x 0.8             |
| K- 07 15 13 45 | 20 mm  | 25       | 5       | 10             | M 5 x 0.8             |
| K- 07 15 13 46 | 20 mm  | 30       | 5       | 10             | M 5 x 0.8             |
| K- 07 15 13 47 | 25 mm  | 5        | 5       | 12             | M 6 x 1               |
| K- 07 15 13 48 | 25 mm  | 10       | 5       | 12             | M 6 x 1               |
| K- 07 15 13 49 | 25 mm  | 15       | 5       | 12             | M 6 x 1               |
| K- 07 15 13 50 | 25 mm  | 20       | 5       | 12             | M 6 x 1               |
| K- 07 15 13 51 | 25 mm  | 25       | 5       | 12             | M 6 x 1               |
| K- 07 15 13 52 | 25 mm  | 30       | 5       | 12             | M 6 x 1               |
| K- 07 15 13 53 | 32 mm  | 5        | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 54 | 32 mm  | 10       | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 55 | 32 mm  | 15       | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 56 | 32 mm  | 20       | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 57 | 32 mm  | 25       | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 58 | 32 mm  | 30       | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 59 | 40 mm  | 5        | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 60 | 40 mm  | 10       | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 61 | 40 mm  | 15       | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 62 | 40 mm  | 20       | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 63 | 40 mm  | 25       | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 64 | 40 mm  | 30       | 6       | 16             | M 8 x 1.25            |
| K- 07 15 13 65 | 50 mm  | 5        | 6       | 20             | M 10 x 1.5            |
| K- 07 15 13 66 | 50 mm  | 10       | 6       | 20             | M 10 x 1.5            |
| K- 07 15 13 67 | 50 mm  | 15       | 6       | 20             | M 10 x 1.5            |
| K- 07 15 13 68 | 50 mm  | 20       | 6       | 20             | M 10 x 1.5            |
| K- 07 15 13 69 | 50 mm  | 25       | 6       | 20             | M 10 x 1.5            |



Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

25.08.2024

HANSA-FLEX AG

www.hansa-flex.com

1

# K-KURZH ZYL EINFACHW SER ASQ

Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series



## Artikel

| Opis           | Ø bata | Hod (mm) | izvedba | Ø batnice (mm) | navoj znotraj batnica |
|----------------|--------|----------|---------|----------------|-----------------------|
| K- 07 15 13 70 | 50 mm  | 30       | 6       | 20             | M 10 x 1.5            |
| K- 07 15 13 71 | 63 mm  | 5        | 6       | 20             | M 10 x 1.5            |
| K- 07 15 13 72 | 63 mm  | 10       | 6       | 20             | M 10 x 1.5            |
| K- 07 15 13 73 | 63 mm  | 15       | 6       | 20             | M 10 x 1.5            |
| K- 07 15 13 74 | 63 mm  | 20       | 6       | 20             | M 10 x 1.5            |
| K- 07 15 13 75 | 63 mm  | 25       | 6       | 20             | M 10 x 1.5            |
| K- 07 15 13 76 | 63 mm  | 30       | 6       | 20             | M 10 x 1.5            |

## Pribor

|                                |   |
|--------------------------------|---|
| K-FUSSBEFESTIGUNG TYP LB 3     | Foot model, »LB« type                               |
| K-FLANSCHBEFESTIGUNG TYP FA2   | Flange model, »FA« type                             |
| K-SCHWENKGABELBEFESTIG CB 1    | Female hinge model, »CB« type                       |
| K-GABELKOEPFEN TYP Y SET 1     | Fork model, »Y« type (incl. threaded adapter)       |
| K-GELENKAUGEN TYP UNIT SET 1   | Rod eye model, »UNIT« type (incl. threaded adapter) |
| K-SENSOREN CS1 KH MIT STECKER  | Sensors »CS1« type, cable with M8 plug              |
| K-SENSOREN CS1 KH OHNE STECKER | Sensors »CS1« type, cable without plug              |