

K-ODER-VENTIL
OR valves

Lastnosti

Obratovalni tlak	2 - 10 bar
območje temperatur:	-10 °C to +80 °C
pretok pri 6,3 bar in Δ 1 bar	500 Nl/min (G 1/8), 1300 Nl/min (G 1/4)
ohišje ventila	aluminij
krogla	Stainless steel
tesnila	NBR



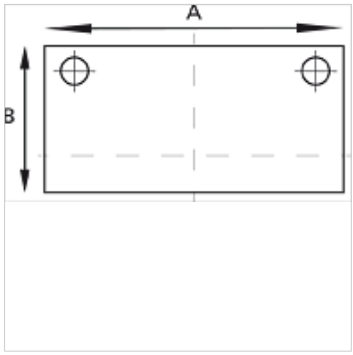

Navodilo

Drugi podatki na zahtevo.

Opis

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

Artikel

Opis	Navoj	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.