



K-KFE-BKR

KFE-ball valves

HANSA FLEX

Lastnosti

Obratovalni tlak	maks. 10 bar
temperatura medija	max. +110 °C
tulci	I.D. 13
ročica	Die cast zinc
krogla, tesnilo rezalnega obroča	PTFE
tesnilo vretena, cevna puša, kapa	EPDM

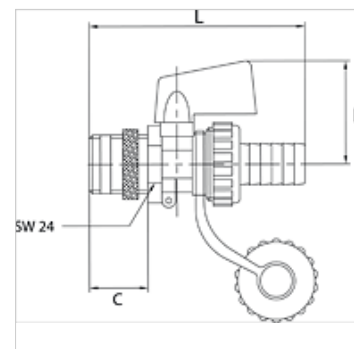

Navodilo

Drugi podatki na zahtevo.

Opis

Boiler, filling and drain valves for heating systems.

Artikel

Opis	Navoj	B (mm)	C (mm)	L (mm)	Material:
K- 07 30 30 34	G 1/2	37,0	20,0	74,6	Brass with a bare metal surface
K- 07 30 30 35	G 1/2	37,0	20,0	74,6	Nickel-plated brass