


K-T-STECK VB RED

Union tees, unequal

HANSA FLEX

Lastnosti

| | |
|---------------------|--|
| delovni tlak | Max. 15 bar, coarse vacuum |
| Območje uporabe | Air, vacuum |
| priporočene cevi | PU or PA (nylon) |
| Sredstva | Compressed air and all gases or liquids that are compatible with the materials |
| območje temperatur: | -20 °C to +80 °C |
| Material: | Plastic, Nickel plated brass |
| potisni obroč | Plastic |
| vrsta priključka | |

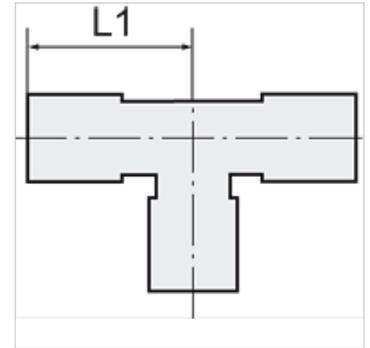

Navodilo

Drugi podatki na zahtevo.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikel

| Opis | za zunanji Ø mm cevi | L1 (mm) |
|----------------|-----------------------|------------|
| K- 07 40 03 62 | 2 x 4 mm / 1 x 6 mm | 19,0 |
| K- 07 40 03 63 | 2 x 6 mm / 1 x 4 mm | 19,0 |
| K- 07 40 03 64 | 2 x 6 mm / 1 x 8 mm | 22,0 |
| K- 07 40 41 42 | 2 x 8 mm / 1 x 4 mm | 22,0 |
| K- 07 40 03 65 | 2 x 8 mm / 1 x 6 mm | 22,5 |
| K- 07 40 03 66 | 2 x 8 mm / 1 x 10 mm | 27,5 |
| K- 07 40 41 43 | 2 x 10 mm / 1 x 6 mm | 27,1 |
| K- 07 40 03 67 | 2 x 10 mm / 1 x 8 mm | 27,9 |
| K- 07 40 03 68 | 2 x 10 mm / 1 x 12 mm | 28,9 |
| K- 07 40 41 44 | 2 x 12 mm / 1 x 8 mm | 28,5 |
| K- 07 40 03 69 | 2 x 12 mm / 1 x 10 mm | 29,3 |
| K- 07 40 41 45 | 2 x 16 mm / 1 x 12 mm | 31,8 |