


# K-BKR ELK 230 VAC, 50 HZ

Stainless steel ball valves with electric actuator 230 VAC, 50 Hz

**HANSA FLEX**

## Lastnosti

|                         |   |
|-------------------------|---|
| temperatura medija      | -20 °C to +70 °C  |
| Obratovalni tlak        | max. 63 bar (depending on temperature and nominal size) |
| trajanje vklopa         | ED 30 %   |
| vlažnost zraka          | 30 % to 95 %  |
| položaji stikala        | Manually operated                                       |
| razred zaščite          | IP 67   |
| čas nastavitve          | 13 sec. = 230 VAC, 50 Hz<br>15 sec. = 24 VDC            |
| temperatura okolice     | -20 °C do +60 °C  |
| konstrukcijska dolžina  | DIN 3203 - M3   |
| montažna prirobnica     | ISO 5211  |
| ohišje                  | Aluminium, powder-coated                                |
| krogelna pipa           | Stainless steel 1.4401/1.4408                           |
| tesnilo krogle          | PTFE, glass fibre-reinforced                            |
| tesnilo preklopne gredi | PTFE, glass fibre-reinforced                            |

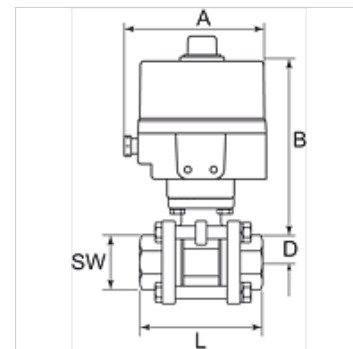

## Navodilo

Drugi podatki na zahtevo.

## Opis

Voltage range 230 VAC, 50 Hz or 24 VDC. <br>Reversible electric rotary actuator.

## Artikel

| Opis           | DN | Navoj    | A<br>(mm) | B<br>(mm) | D<br>(mm) | L<br>(mm) | SW<br>(mm) |
|----------------|----|----------|-----------|-----------|-----------|-----------|------------|
| K- 07 30 20 58 | 15 | Rp 1/2   | 152,0     | 191,0     | 24,0      | 75,0      | 29         |
| K- 07 30 20 59 | 20 | Rp 3/4   | 152,0     | 195,0     | 26,0      | 80,0      | 35         |
| K- 07 30 20 60 | 25 | Rp 1     | 152,0     | 203,0     | 29,0      | 90,0      | 41         |
| K- 07 30 20 61 | 32 | Rp 1 1/4 | 152,0     | 209,0     | 36,0      | 110,0     | 50         |
| K- 07 30 20 62 | 40 | Rp 1 1/2 | 152,0     | 219,0     | 40,0      | 120,0     | 58         |
| K- 07 30 20 63 | 50 | Rp 2     | 152,0     | 275,0     | 48,0      | 140,0     | 72         |