

K-STECKVERBINDU RED

Reducers

Lastnosti

delovni tlak	Max. 16 bar
delovna temperatura	-20 °C to +150 °C
Material:	ponikljana medenina
potisni obroč	Nickel-plated brass
vpenjalni obroč	Stainless steel



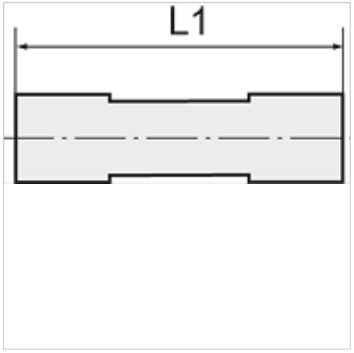

Navodilo

Drugi podatki na zahtevo.

Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikel

Opis	za zunanji Ø mm cevi	L1 (mm)
K- 07 40 47 75	6 mm / 4 mm	33,0
K- 07 40 47 76	8 mm / 6 mm	39,0
K- 07 40 47 77	10 mm / 8 mm	39,5
K- 07 40 47 78	12 mm / 10 mm	41,5

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.