



K-SCHOTT-STECKVERB 3

Female bulkhead connectors

HANSA FLEX

Lastnosti

| | |
|---------------------|--|
| delovni tlak | Max. 15 bar, coarse vacuum |
| Območje uporabe | Air, vacuum |
| priporočene cevi | PU or PA (nylon) |
| Sredstva | Compressed air and all gases or liquids that are compatible with the materials |
| območje temperatur: | -20 °C to +80 °C |
| Material: | Plastic, Nickel plated brass |
| potisni obroč | Plastic |

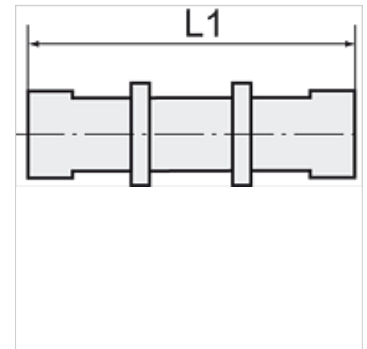

Navodilo

Drugi podatki na zahtevo.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikel

| Opis | za zunanji Ø mm cevi | navoj stikalne plošče | L1 (mm) | zev ključa |
|----------------|----------------------|-----------------------|---------|------------|
| K- 07 40 04 31 | 4 mm | M 12 x 1 | 31,1 | 14 mm |
| K- 07 40 04 32 | 6 mm | M 14 x 1 | 33,4 | 17 mm |
| K- 07 40 04 33 | 8 mm | M 16 x 1 | 37,7 | 19 mm |
| K- 07 40 04 34 | 10 mm | M 20 x 1 | 41,8 | 24 mm |
| K- 07 40 04 35 | 12 mm | M 22 x 1 | 46,7 | 27 mm |
| K- 07 40 04 36 | 16 mm | M 27 x 1 | 51,2 | 32 mm |