


K-Y-STECK VB MINI

Y unions, mini

HANSA FLEX

Lastnosti

| | |
|---------------------|------------------------------|
| delovni tlak | Max. 10 bar, vacuum |
| Območje uporabe | Air, vacuum |
| priporočene cevi | PU or PA (nylon) |
| Sredstva | stisnjen zrak |
| območje temperatur: | 0 °C to +60 °C |
| Material: | Plastic, Nickel plated brass |
| potisni obroč | Plastic |

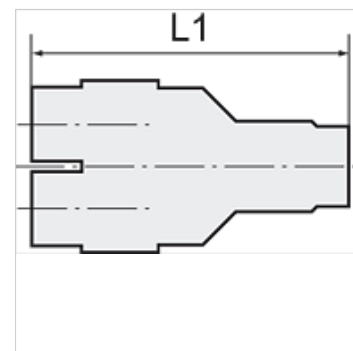

Navodilo

Drugi podatki na zahtevo.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Artikel

| Opis | za zunanji Ø mm cevi | L1 (mm) |
|----------------|----------------------|------------|
| K- 07 40 50 20 | 3 mm | 28,8 |
| K- 07 40 50 21 | 4 mm | 29,4 |
| K- 07 40 50 22 | 6 mm | 31,8 |